

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 November 2001 (01.11.2001)

PCT

(10) International Publication Number
WO 01/80921 A2

- (51) International Patent Classification⁷: **A61L 31/00**
- (21) International Application Number: PCT/US01/12918
- (22) International Filing Date: 20 April 2001 (20.04.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/198,792 20 April 2000 (20.04.2000) US
60/221,828 28 July 2000 (28.07.2000) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:
US 60/198,792 (CIP)
Filed on 20 April 2000 (20.04.2000)
US 60/221,828 (CIP)
Filed on 28 July 2000 (28.07.2000)
- (71) Applicant (for all designated States except US): **EMORY UNIVERSITY** [US/US]; 2009 Ridgewood Drive, Atlanta, GA 30322 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **CHAIKOF, Elliot, L.** [US/US]; 150 Wicksford Glen, Atlanta, GA 30350 (US). **CONTICELLO, Vincent** [US/US]; 375 Arizona Avenue, Atlanta, GA 30307 (US). **HUANG, Lei** [CN/US]; 2473 Winsley Place, Duluth, GA 30097 (US). **NAGAPUDI, Karthik** [IN/US]; 1023 Hemphill Ave. #3, Atlanta, GA 30318 (US).
- (74) Agents: **FERBER, Donna, M.** et al.; Greenlee, Winner and Sullivan, P.C., Suite 201, 5370 Manhattan Circle, Boulder, CO 80303 (US).
- (81) Designated States (national): AU, CA, JP, US.
- (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:
--- without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NATIVE PROTEIN MIMETIC FIBERS, FIBER NETWORKS AND FABRICS FOR MEDICAL USE

(57) Abstract: The present disclosure provides spun fibers of proteins useful for the fibers, fiber networks and nonwoven fabrics for medical use, with these materials characterized by good biocompatibility properties (e.g., low tendency toward thromboses and inflammation when implanted into a human or animal). These materials can be fabricated from gelatin, collagen or elastin-mimetic proteins, functionalized proteins of the foregoing types, crosslinked functionalized proteins of the foregoing types, and there may be incorporated nonproteinaceous polymers and/or therapeutic proteins or other medicinal compounds. Additionally, there may be living cells colonized on the material of the present invention or living cells may be incorporated during the fabrication process. These materials can be used in medical applications including, without limitation, vascular grafts, reinforcement of injured tissue, wound healing, artificial organs and tissues, prosthetic heart valves and prosthetic ureters.

WO 01/80921 A2

5 NATIVE PROTEIN MIMETIC FIBERS, FIBER NETWORKS AND
FABRICS FOR MEDICAL USE.

ACKNOWLEDGMENT OF FEDERAL RESEARCH SUPPORT

0 This invention was made, at least in part, with funding from the National Institutes of Health, National Science Foundation and the NASA Research Agency. Accordingly, the United States Government may have certain rights in this invention.

BACKGROUND OF THE INVENTION

5 The present invention relates to fibers, fiber networks and fabrics formed, at least in part, from synthetic elastin-mimetic proteins, functionalized elastin mimetic proteins including methacrylate-, vinyl- or acrylate-modified elastin-mimetic proteins, functionalized collagen such as acrylate-, vinyl- or or methacrylate modified collagen, functionalized gelatin modified in a similar manner to the foregoing proteins, collagen fibers, gelatin fibers, crosslinked
10 collagen, gelatin or elastin mimetic fibers, and fiber networks and fabrics made using these materials.

Atherosclerosis is a serious cause of morbidity and death despite advances in preventive measures and pharmacological therapeutics. Nearly 700,000 vascular surgical procedures are
15 performed annually in the United States, along with several hundred thousand peripheral and coronary angioplasties. Prosthetic bypass grafts and, more recently, arterial stents and other endovascular prostheses have been utilized in association with these reconstructive procedures. Although large diameter vascular grafts (≥ 6 mm internal diameter) have been successfully developed from polymers such as polytetrafluoroethylene and polyethylene terephthalate, the
20 fabrication of a durable small diameter prostheses (≤ 6 mm internal diameter) remains unsolved. Furthermore, while prosthetic bypass grafting can be performed in the infrainguinal position with reasonable short-term success, within 5 five years 30% to 60% of these grafts will fail.

5 Likewise, restenosis and/or occlusion occurs in as many as 50% of all patients within 6 months of stent placement, depending upon the site and the extent of the disease.

It is recognized that the adverse events leading to the failure of many vascular prostheses are related to maladaptive biological reactions at the blood-material and tissue-
0 material interface. Grafts and stents have been coated with albumin, heparin, or prostacyclin analogues, which inhibit the clotting cascade and platelet reactivity, or with relatively inert materials, such as polyethylene oxide. An alternate approach has been to design arterial substitutes on the basis of tissue engineering principles in which a vessel construct is created using cultured endothelial cells, smooth muscle cells (SMC), and fibroblasts, which are
5 reformulated to yield an artificial intima, media, and adventitia, respectively. Initial investigations utilizing this strategy have included seeding endothelial cells into the lumen of a compacted SMC/collagen tubular construct. This approach was limited by the requirement for a surrounding Dacron enclosure, which was necessary to provide adequate tensile strength for successful *in vivo* implantation. Cellular constructs with more robust mechanical properties
10 have been produced by growing sheets of smooth muscle cells and fibroblasts in tissue culture flasks that are then rolled onto a mandrel and allowed to mature *in vitro* over a period of up to 12 weeks. When combined with reconstituted tubular sheets of freeze-dried collagen, burst strengths exceeded 2,000 mm Hg. The necessity for eight or more weeks of *in vitro* preconditioning has been reported despite utilization of an internal polyglycolic acid (PGA) scaffold onto which SMCs were seeded. Thus, all current tissue engineering approaches
15 directed at the generation of a bioengineered blood vessel remain limited by a continued requirement for a several month preconditioning period, a surrounding synthetic polymeric sheath, or an internal synthetic biodegradable scaffold. Significantly, the use of a Dacron or PGA mesh does not recapitulate the biomechanical characteristics of a native blood vessel. Moreover, these synthetic materials uniformly induce an undesirable inflammatory response
20 in the patient after implantation.

There is a longfelt need in the art for durable materials for medical and veterinary use in organ substitutes including, without limitation, blood vessels, heart valves, ligaments,
25 tendons, and other load bearing prosthetic materials, as well as those materials to facilitate

5 wound closing and/or healing, and where the resident tissue will benefit from reinforcement, where those materials are compatible with human and animal physiologies such that thromboses, inflammation and other harmful physiological reactions are not induced. It is also important that there be durable and biologically compatible materials which do not require lengthy preconditioning periods prior to implantation in a patient in need of the prosthetic
.0 material.

SUMMARY OF THE INVENTION

The present invention provides biologically compatible protein fibers, fiber networks, fabrics and crosslinked fibers for use in medical and veterinary applications. These materials
.5 are characterized by resilience, flexibility, extensibility, tensile strength, mechanical strength and ability to recover shape after distortion, similar to that of native proteins in biological materials. The present materials, especially those which comprise crosslinked elastin, crosslinked elastin mimetic protein, crosslinked collagen and/or crosslinked gelatin, are especially useful in the medical or veterinary area because of the similarity of the physical
:0 properties of the materials as well as the biological compatibility which is improved over many synthetic materials which induce inflammation and/or thrombosis, depending on the site used. Functionally modified elastin, elastin mimetic protein, collagen and gelatin can also form the materials of the present invention. Alternatively, crosslinked proteinaceous fibers, networks and nonwoven fabrics can be form of proteins which are crosslinked with glutaraldehyde treatment
:5 or other means known to the art which preserves the desirable physical properties of the material, i.e., flexibility, extensibility, tensile strength and the like.

The present invention provides elastin mimetic proteins and crosslinked materials formed into fibers, fiber networks, fabrics and tubing. The fibers can be in the form of thin
:0 filaments, beaded fibers or ribbon like structures, with fiber diameters from about 200 to about 3000 nm, depending on the electrospinning conditions as taught hereinbelow. These materials can optionally include at least one additional material which is fiber-forming but which does not include functional groups which can mediate crosslinking such as poly(ethylene oxide) which provides some physical strength to the material and again, optionally, a biologically
:5 active material such as a therapeutic protein or other pharmacologically compound. A

5 polysaccharide can also be incorporated. The fiber morphology and physical properties are affected by the PEO molecular weight as well as by the relative amount of PEO in the fiber forming solution. The PEO dissolves relatively slowly under physiological conditions, which can provide for release of the additional material(s). Anti-inflammatory agents and/or growth factors which stimulate wound healing or tissue repair and antitumor agents are but a few of the biologically and pharmacologically agents which occur to one of ordinary skill in the art for inclusion in the material of the present invention. The skilled artisan knows how to choose a therapeutic protein or other compound according to the needs of the human or animal patient in which the material is used. Where the fibers are to be crosslinked prior to use, an initiator of crosslinkage, e.g., a photoinitiator, can be incorporated into the solution from which the fibers are spun, with the result that the initiator is then present within the fiber.

The present invention further provides improved prosthetic materials for medical and veterinary use. These materials are formed of functionally modified elastin mimetic fibers which have been crosslinked using photoinitiators (i.e., under relatively mild conditions with respect to free radicals and temperature) and photoirradiation, and/or collagen or gelatin fibers which are crosslinked. Prosthetic materials can include, without limitation, tubing for vascular prostheses, ureters, esophagus, bladder, intestine, heart planar materials for use in reinforcing injured tissues (cartilage, tendons; heart valves, heart muscle, bladder, esophagus, ligament, stomach, among others) and for use as topical applies materials for promoting wound healing after injury or in facilitating healing of surgical incisions (including without limitation intestinal anastomoses or lung biopsy) or remediation of hernias. Crosslinking can be effected after casting each protein layer or crosslinking can take place after a multilayer material has been produced. Where used in surgical applications, hydrophilic polysaccharides and/or glycopolymers can be incorporated to reduce adhesion formation after surgical intervention by placing the material at the surgical site.

Within the scope of the present invention are hybrid elastin/collagen materials, which can be formed by depositing alternating layers of elastin or an elastin mimetic protein, either as protein fibers or as cast films of native protein and/or elastin mimetic protein and collagen or functionalized collagen. Nonwoven fabrics are especially useful products of the present

5 invention. The functionally modified elastin or elastin mimetic protein and/or collagen can be crosslinked once formed into nonwoven fabrics for improved stability, resistance to dissolution and improved physical properties. An advantageous aspect of the present invention is a lamellar repeat of an elastin mimetic layer sandwiched between collagen layers. The nonwoven fabric of this aspect of the invention can have from one lamellar repeat up to about ten
0 thousand sequentially layered lamellar repeats. The thickness of each lamellar repeat layer affects the ultimate physical properties of the product.

It is a further aspect of the present invention to provide an elastin, elastin mimetic, elastin mimetic/collagen hybrid, gelatin or collagen nonwoven fabric which further comprises
5 living cells. The living cells can be at least one of, but not limited to endothelial cells, smooth muscle cells, fibroblasts, stem cells, chondrocytes, osteoblasts or a human or animal cell which has been genetically engineered to produce a protein of interest. The protein of interest can be a growth factor which could promote wound healing, or a peptide hormone such as insulin in the context of an artificial organ, or an antiangiogenic protein to be used in an antitumor
10 application, and others will readily occur to one of ordinary skill in the art. The living cells can be incorporated between lamellar repeat units, and the cells can be deposited by techniques including, but not limited to, electrodeposition and sedimentation.

The materials of the present invention can be used in the form of conduits, or planar
15 sheets or they can be formed into other shapes by rolling to form hollow tubing or by sequential deposition onto a rotating mandrel or other forms or molds.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs 1A-1B show the V_{start} and V_{stop} for various solution concentrations (Fig. 1A) and
20 corresponding viscosities (Fig. 1B) of elastin-mimetic peptide aqueous solutions.

Figs. 2A-2D present SEM micrographs of elastin-mimetic peptide fibers spun from 5 wt% solution at 50 $\mu\text{l/ml}$ (Fig. 2A), 100 $\mu\text{l/ml}$ (Fig. 2B), 150 $\mu\text{l/ml}$ (Fig. 2C), 200 $\mu\text{l/ml}$ (Fig. 2D) flow rate.

5 Figs. 3A-3D present SEM micrographs of elastin-mimetic peptide fibers spun from 10 wt% solution at 50 $\mu\text{l/ml}$ (Fig. 3A), 100 $\mu\text{l/ml}$ (Fig. 3B), 150 $\mu\text{l/ml}$ (Fig. 3C), 200 $\mu\text{l/ml}$ (Fig. 3D) flow rate.

0 Figs. 4A-4D present SEM micrographs of elastin-mimetic peptide fibers spun from 15 wt% solution at 50 $\mu\text{l/ml}$ (Fig. 4A), 100 $\mu\text{l/ml}$ (Fig. 4B), 150 $\mu\text{l/ml}$ (Fig. 4C), 200 $\mu\text{l/ml}$ (Fig. 4D) flow rate.

5 Figs. 5A-5D present SEM micrographs of elastin-mimetic peptide fibers spun from 20 wt% solution at 50 $\mu\text{l/ml}$ (Fig. 5A), 100 $\mu\text{l/ml}$ (Fig. 5B), 150 $\mu\text{l/ml}$ (Fig. 5C), 200 $\mu\text{l/ml}$ (Fig. 5D) flow rate.

Figs. 6A-6D are high resolution SEM (Figs. 6A and 6B) and TEM (Figs. 6C and 6D) micrographs of elastin-mimetic peptide fibers spun from a 20% wt% solution at 100 $\mu\text{l/ml}$ flow rate, which demonstrate a twisted ribbon-like morphology.

10 Figs. 7A-7B are SEM micrographs (Figs. 7A and 7B) of a non-woven fabric spun from a 15% wt. solution of elastin-mimetic peptide at 150 $\mu\text{l/ml}$.

15 Fig. 8 illustrates fiber diameter distribution within a non-woven fabric spun from a 15 wt% solution of elastin-mimetic peptide at 150 $\mu\text{l/ml}$.

Fig. 9 shows distribution of fiber orientation within a non-woven fabric spun from a 15 wt% solution of elastin-mimetic peptide at 150 $\mu\text{l/ml}$.

20 Fig. 10 is a representative uniaxial stress-strain curve for drying a non-woven fabric of elastin-mimetic peptide fibers.

25 Figs. 11A shows ^1H NMR spectra of elastin and elastin methacrylamide measured in D_2O (*) at room temperature. Expanded region of the protons corresponding to the double bonds (H^a , H^b) is also shown for the elastin methacrylamide spectrum. Fig. 11B shows an

5 expanded version of the figure between 2.6 and 3.1 ppm. The spectra indicate the shift in the methylene protons α to the amino group prior (H^c) and subsequent (H^d) to methacryloylation.

Fig. 12 shows 1H NMR spectra of elastin and AME. The DOF of AME's is provided in the brackets. The expanded portion of the spectra between 2.6 and 3.1 ppm. As DOF increases the H^d peak grows in intensity at the expense of the H^c peak. The DOF can be
0 computed from the integrated intensities of the H^c and H^d peaks.

Fig. 13 shows temperature-dependent turbidimetry data for elastin and acrylate-modified elastin with different degrees of functionalization. The inverse transition temperature (T_i) decreases with increase in the degree of functionalization (DOF). DOF dictates the
5 temperature (processing window) at which fibers can be formed from aqueous solutions. The temperature window to the left of T_i is amenable for fiber formation.

Fig. 14 shows SEM micrographs of fibers spun from a 10 wt% AME(65) solution at room temperature. Flow rate = 50 μ l/min, Photoinitiator = EY (3 wt% of protein content). Long uniform fibers are produced with occasional triangle type bifurcation points. Fibers in
0 the diameter range from 300-500 nm were produced.

Fig. 15 presents SEM micrographs of fibers spun from a 15 wt% AME(65) solution at room temperature. Flowrate = 50 μ l/min, Photoinitiator = EY (3 wt% of protein content). Long uniform fibers are produced with a flattened or ribbon shaped morphology. Fibers in
5 a variety of diameter ranges are produced (typically from 300 nm - 2 μ m).

Fig. 16 shows ^{13}C CP/MAS/TOSS spectra of elastin-mimetic polypentapeptide, methacrylate-modified elastin and crosslinked elastin recorded at room temperature (23 $^{\circ}C$). Contact time = 1ms and spinning speed ($\omega_r/2\pi$) = 5 kHz. Disappearance of the peaks C^a and C^b in the spectrum for the crosslinked material indicate complete crosslinking after exposure
0 either to UV at 365 nm or visible light. The peaks labeled "*" are from the photoinitiator (Irgacure 2959[®]) employed for crosslinking.

5 Fig. 17 illustrates degree of crosslinking of AME(88) determined by ^{13}C solid-state NMR as a function of irradiation time. Data presented as mean \pm standard deviation.

0 Fig. 18(A) shows a stress-strain curve of crosslinked and uncrosslinked fabric samples of elastin methacrylamide in the dry state. Crosslinking increases both tensile strength and modulus of the sample. Fig. 18B shows stress-strain curves of dry and hydrated (O) crosslinked AME(65) fabric samples of elastin methacrylamide measured at a strain rate of 1 mm/min at room temperature.

5 Figs. 19A-19D are SEM micrographs of collagen-PEO (1:1) fibers spun from 2wt% acid solution at a flow rate of 100 $\mu\text{L}/\text{min}$ and at different NaCl concentrations: Fig. 19A, 15mM NaCl, 10 kX magnification; Fig. 19B, 25mM NaCl, 5kX magnification; Fig. 19C, 34mM NaCl, 2 kX magnification; and Fig. 19D, 68mM NaCl, 5 kX magnification.

0 Figs. 20A-20D are SEM micrographs of collagen-PEO (1 :1 (w/w), 34 mM NaCl) fibers spun from 2wt% acid solution at different flow rates ($\mu\text{L}/\text{min}$): Fig. 20A, 25; Fig. 20B, 75; Fig. 20C, 100; and Fig. 20D, 150.

5 Fig. 21 shows ^{13}C MAS spectra of collagen, PEO and a 1:2 collagen-PEO blended fabric. The CP spectrum of the blend appears to be a simple superposition of the CP spectrum of PEO (*) and collagen (C). The DP spectrum of the blend (DP discriminates against the more rigid components) shows that PEO is highly mobile in the sample when compared to collagen at the measuring temperature (24 $^{\circ}\text{C}$).

0 Fig. 22A shows the ^1H NMR spectrum of 1:2 collagen-PEO fabric is shown before and after the application of the dipolar filter. The dipolar filter eliminates the broad component of the spectrum and retains the narrow component. Fig. 22B shows the ^{13}C CP/MAS/TOSS spectra before and after application of the dipolar filter. After selection, only the PEO resonance is retained demonstrating that effective selection of mobile component has been achieved using the dipolar filter.

Fig. 23 provides spin diffusion data for 1:1 and 1:2 collagen-PEO fabrics. The initial portion of the curve, corresponding to times less than 9 ms, is shown in the inset. The data illustrates the presence of an interface for a 1:1 blend while showing no appreciable interface for a 1:2 blend. The dotted lines indicate the theoretical end point values for spin diffusion in case of 1:1 (●) and 1:2 (□) blends.

Fig. 27 provides the ^{13}C CP/MAS/TOSS solid-state spectra of gelatin methacrylamide and crosslinked gelatin methacrylamide (MAS rate = 6 kHz). The inset shows the resonances from the double carbons (a, b). Spectrum of the crosslinked sample was collected on a film sample which was irradiated under visible light for 2 hours. The disappearance of the double bonds indicates complete crosslinking in the sample.

Fig. 28A-28B depict nonwoven crosslinked tubes of gelatin methacrylamide (Fig. 28A) prior to hydration and (Fig. 28B) in hydrated state. A 5 cm 14 mm tube is shown.

Fig. 29A shows the diffusion profiles obtained from PFGNMR measurements for varying diffusion times are shown as a function of the magnetic field gradient. Fig. 29B shows the 1000-ms profile in (a) has been remade showing the normalized intensity as a

function of a parameter α^2 ($\alpha^2 = \frac{\gamma^2 \delta^2 G^2}{5}$). The data has been fitted to a Gaussian distribution of pore sizes.

Figure 30A-30B provide a comparison of data between natural systems and electrospun fabrics produced in the lab. Fig. 30A shows the stress-strain behavior of human iliac artery, data from Roach M.R. and Burton A.L. (1957) *Can. J. Biochem. Physiol.* 35: 681, 1957. Fig. 30B shows the stress-strain behavior of crosslinked collagen and elastin fabrics produced by electrospinning. The mechanical behavior of the fabricated materials qualitatively mimics the behavior of natural artery.

5 DETAILED DESCRIPTION OF THE INVENTION

Abbreviations used in the present application include the following: PEO, poly (ethylene oxide); PGA, polyglycolic acid; AME, acrylate modified elastin (or elastin mimetic); DOF, degree of functionalization; DCC, dicyclohexylcarbodiimide; DDG, 2,3-dichloro-5,6-dicyano-1,4-benzoquinone; DMAP, *N,N*-dimethylaminopyridine; EY, eosin Y; FITC, fluorescein isothiocyanate; NHS-Biotin, *N*-hydroxysuccinimidobiotin; EMC, ϵ -maleimidocaproyl; EMCS, ϵ -maleimidocaproyl succinimide; PMB, *p*-methoxybenzyl; *Troc*-amide, 2,2,2-trichloroethoxyamide; PEU, poly(ether urethaneurea); PFTE, polytetrafluoroethylene; ePFTE, expanded polytetrafluoroethylene; HEA, 2-hydroxyethyl acrylate; AOD, 3-acryloyl- ϵ -3-(*N,N*-dioctadecylcarbamoyl propionate); AAPD, 2,2'-azobis(2-methylpropionamidine) dihydrochloride; AIBN, 2,2'-azobisisobutyronitrile; SS, styryl sulfonate. Standard one- and three-letter abbreviations for the twenty naturally occurring, protein building block amino acids are used herein.

As part of our program in biomimetic materials and tissue engineering, we have targeted several elements of the arterial wall as structural models for the design of an artificial blood vessel based upon the assembly of component structures. The arterial wall as representative of other tissues and organ systems can be considered in general terms as a fiber-reinforced composite material with associated mechanical properties largely a consequence of protein fiber networks. Moreover, the local mechanical environment within the vessel wall may in turn influence the functional responses of component cells.

Biocompatibility (or biological compatibility) refers to the interactions of living body tissues, compounds and fluids, including blood, etc., with any implanted or contacting material (biomaterial). Biocompatible biomaterials are of great importance in any biomedical application including, for example, in the implantation of vascular grafts and medical devices such as artificial organs, artificial heart valves, artificial joints, catheters and various other prosthetic devices into or on the body. Biomaterials with good biocompatibility do not trigger inflammatory reactions after implantation in or contact with human or animal tissue nor do they provide surfaces which are prone to thromboses.

5 In the context of the present invention, a functionalized protein is one which has, covalently bound to it, at least one moiety which mediates polymerization or crosslinkage with another moiety of the same chemical structure. The functionalized elastin mimetic protein, elastin, collagen or gelatin of the present invention comprise at least one polymerizable monomeric group, e.g., an acryloyloxy group, methacryl, dienyl, sorbyl, styryl, acrylamide, 0 acrylonitrile, N-vinyl pyrrolidone, etc., which group is covalently attached to the protein and which modulates crosslinking between similarly functionalized proteins. Desirably, photoirradiation mediates the crosslinking reaction in the presence of a suitable photoinitiator, under mild conditions of temperature and radical formation to minimize damage to the proteins. Functionalization of the protein is carried out so that the desirable mechanical and structural 5 properties of the protein superstructure comprised of it are generally maintained. Conditions and initiators for crosslinking reactions are well known to the art.

As used herein, an elastin mimetic protein is one which has an amino acid sequence and secondary structure derived from native (naturally occurring) elastin. As specifically exemplified 0 herein, the elastin mimetic protein is recombinantly produced in *Escherichia coli*, and it is described in McMillan et al. (1999) *Macromolecules* 32: 3643-3648. This elastin mimetic protein contains 39 repeats of the amino acid sequence (Val-Pro-Gly-Val-Gly)₄(Val-Pro-Gly-Lys-Gly) (SEQ ID NO:4). See also Huang et al. (2000) *Macromolecules* 33: 2989-2997 and McMillan et al. (2000) *Macromolecules* 33: 4809-4821. It is critical that it has elastomeric 5 properties and tensile strength similar to those elastin when assembled into supramolecular structures such as fibers, fiber networks and nonwoven fabrics.

Elastomeric proteins are widely distributed among a diverse range of animal species and tissues where they have evolved precise structures to perform specific biological functions. 0 These proteins, which include for example, abductin [Cao et al. (1997) *Curr. Biol.* 7: R677-8], tropoelastin [Gray et al. (1973) *Nature* 246: 461-6; Sandberg et al. (1981) *N. Engl. J. Med.* 304: 566-579; Urry et al. Ed., Birkhauser: Boston, 1997, pp 133-177] bysuss [Deming, T. J. (1999) *Curr. Opin. Chem. Biol.* 3: 100-5], silk [Hayashi et al. (1999) *Int. J. Biol. Macromol.* 24: 271-5; Hayashi, C. Y. and Lewis, R. V. (1998) *J. Mol. Biol.* 275: 773-84], and titin all 5 possess rubber-like elasticity, undergoing high deformation without rupture, storing energy

5 involved in deformation, and then recovering to their original state when the stress is removed. The ability of proteins to exhibit rubber-like elasticity relates both to their primary and secondary structure, as well as to those features, such as protein self-assembly and other intermolecular interactions that dictate the formation of true or virtual networks. Elastomeric materials must satisfy two criteria. First, in order to respond quickly to an applied force, the
0 monomers, which in elastomeric proteins typically consist of repetitive glycine-rich peptide motifs, must be flexible and conformationally free. Second, elastomeric macromolecules must be crosslinked to form a network. Characteristically, elastic proteins combine elastomeric domains with domains that form covalent or noncovalent crosslinks. Thus, the size and properties of the elastic domains and the degree of crosslinking influence the elastic behavior
5 of protein-based materials. Tensile strength is important in certain applications, and collagen and gelatin and crosslinked acrylate modified collagen improves the tensile strength of artificial fibers, fiber networks and fabrics and the like.

Elastin, which is derived from the soluble precursor tropoelastin, is widely distributed
10 in vertebrate tissues. The elastin protein consists of repetitive glycine-rich hydrophobic elastomeric domains of variable length that alternate with alanine-rich, lysine-containing domains that form crosslinks [Sandberg et al. (1981). *N. Engl. J. Med.* 304: 566-579; Urry et al., Ed.; Birkhauser: Boston, 1997, pp 133-177; Sandberg et al. (1981). *N. Engl. J. Med.* 304: 566-579; Urry et al., Ed.; Birkhauser: Boston, 1997, pp 133-177]. Native elastin's intrinsic
15 insolubility has largely limited its capacity to be purified and processed into forms suitable for biomedical or industrial applications. Recently, this limitation has been largely overcome, in part, by the structural characterization of the elastomeric domains. Specifically, comprehensive sequence analysis has revealed the presence of consensus tetra- (VPGG), penta- (VPGVG), and hexapeptides (APGVGV) repeat motifs [Gray et al. (1973) *Nature* 246: 461-6; Urry et al. (1975) *Biochim. Biophys. Acta* 393: 296-306; Sandberg et al. (1977) *Adv. Exp. Med. Biol.* 79: 277-84; Khaled et al. (1976) *J. Am. Chem. Soc.* 98: 7547-53; Rapaka et al. (1978) *Int. J. Pept. Protein Res.* 11: 109-27; Urry et al. (1986) *Int. J. Pept. Protein Res.* 6: 28, 649-660; Broch et al. (1998) *Biomol. Struct. Dyn.* 15: 1073-1091]. VPGG, VPGVG and APGVGV are given in SEQ ID NO:1, SEQ ID NO:2 and SEQ ID NO:3, respectively.
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715

5 highly mobile backbone and the presence of β -turns and a loose helical β -spiral, that are consistent with those of native elastin [Urry et al. (1974) *Biochemistry* 13: 609-16; Urry et al.(1985) *Biopolymers* 24: 2345-2356]. Thus, the pentapeptide sequence (VPGVG) (SEQ ID NO:2) has formed the basis for the synthesis of protein polymers with elastomeric domains by standard solution and solid phase chemical methodologies and, more recently, by genetic
0 engineering strategies [McPherson et al. (1992) *Biotechnology Progress* 8: 347-352; McPherson et al. (1996) *Protein Expression Purification* 7: 51-57; Panitch et al. (1999) *Macromolecules* 32: 1701-1703; McMillan et al. (1999) *Macromolecules* 32: 3643-3648; McMillan R.A. and Conticello, R. P. (2000) *Macromolecules* 33: 4809-4821].

5 In tissues, such as arterial blood vessels, where energy and shape recovery are critical parameters, elastin networks dominate low strain mechanical responses. Avoidance of artery wall fatigue and failure is dependent upon the resilience of elastin, which prevents the dissipation of transmitted pulsatile energy as heat. While elastin fibers are structurally complex and may contain glycoproteins and glycosaminoglycans, the physical properties of the
10 network have been attributed primarily to the elastin protein component produced from the soluble precursor tropoelastin [Debelle et al. (1999) *Internat. J. Biochem. Cell Biol.* 31:261-272]. Furthermore, extensive investigations by Urry and others [Urry et al. (1985) *Biochem. Biophys. Res. Commun.* 130: 50-57; Thomas et al. (1987) *Biopolymers* 26:921-934; Urry, D.W. (1988) *J. Prot. Chem.* 7: 1-34; Chang et al. (1988) *Chem. Phys. Lett.* 147: 395-400; Urry et al. (1989) *Biopolymers* 28: 819-833; Chang et al. (1989) *J. Biomolec. Struct. Dyn.*
15 6: 851-858; Urry, D.W. (1993) *Angew. Chem. Int. Ed. Engl.* 32: 819-841; Urry et al. (1995) *Ciba Foundation Symposium* 192: 4-30; Urry et al. Ed.; Birkhauser: Boston, 1997, pp 133-177; Sandberg et al. (1977) *J. Adv. Exp. Med. Biol.* 79: 277; Foster et al. (1973) *J. Biol. Chem.* 24:2876; Sandberg et al. (1985) *Pathol. Biol.* 33:266-274; Wasserman et al. (1990) *Biopolymers* 29:1613-1628] since the mid-1970s have revealed that the molecular folding
20 and/or self-assembly of tropoelastin into more ordered structures, as well as its elastomeric nature are due to the frequent appearance of a pentapeptide unit (Valine-Proline-Glycine-Valine-Glycine; SEQ ID NO:1). The presence of lysine residues along the native protein backbone facilitates intermolecular crosslinking, which further influences the mechanical
25 responses of the elastin fiber network. Model polymers based upon the pentapeptide sequence

5 have been synthesized by solution chemistry and solid phase approaches [Urry et al. (1985) *Syntheses, Characterizations and Medical Uses of the Polypeptide of Elastin and its Analogs*; William D.F. Ed.; CRC Press: Boca Raton, FL] and recently by more efficient recombinant genetic engineering methodologies [McPherson et al. (1992) *Biotechnology Progress* 8: 347-352; McPherson et al. (1996) *Protein Expression Purification* 7: 51-57; 0 Panitch et al. (1999) *Macromolecules* 32: 1701-1703; McMillan et al. (1999) *Macromolecules* 32: 3643-3648]. These protein polymers have been processed into elastomeric hydrogels of various forms including sheets and tubular constructs by chemical, enzymatic, and γ -irradiation mediated crosslinking of protein solutions [Urry et al (1997) *supra*]. These polymers have also been used in generating thin films. For example, Panitch et al. (1999) *supra* have produced 5 elastin-like protein polymers containing a periodically spaced cell binding fibronectin CS5 domain. When cast from solution onto an otherwise non-adhesive substrate, these polymers promoted cell adhesion and growth. Efficient processing strategies, which can convert elastin peptide polymers into fibers and networks that mimic native structures, enhance the utility of these materials.

10 The production of fibers from protein solutions has typically relied upon the use of wet or dry spinning processes [Martin et al. *Processing and Characterization of Protein Polymers*; McGrath, K. and Kaplan, D., Ed.; Birkhauser: Boston, 1997, pp.339-370; Hudson, S.M. *The Spinning of Silk-like Proteins into Fibers*; McGrath, K. and Kaplan, D., Ed.; Birkhauser: 15 Boston, 1997, pp. 313-337]. Wet spinning, more commonly used, involves the extrusion of a protein solution through a spinneret into an acid-salt coagulating bath, which usually contains aqueous ammonium sulfate, acetic acid, isopropanol, or acetone. Alternatively, dry spinning consists of extrusion into an evaporative atmosphere. Both approaches yield large diameter fibers which do not mimic the morphological characteristics of native protein fibers. 20 Furthermore, both strategies rely on biologically toxic solvent systems that preclude the fabrication in real time of hybrid protein-cell constructs. Electrospinning is a third approach that has been recently utilized to generate protein fibers [Reneker et al. (1996) *Nanotechnology* 7: 216-223; Doshi et al. (1995) *J. Electrostatics* 35: 151-160]. In this technique, a polymer solution is subjected to an electric field that induces the accumulation of charge on the surface 25 of a pendent drop. Mutual charge repulsion causes a force which directly opposes that

5 produced by surface tension. At a critical value of electric field strength, a repulsive electric force exceeds the surface tension force, and a charged jet of solution is ejected. The jet splays into a series of fine filaments with a range of diameters that are characteristically on the order of several tens or hundreds of nanometers. Given the high surface area to volume ratio of these nanofibers, solvent evaporation occurs relatively quickly even when operating with aqueous solutions at ambient temperature and pressure. Several examples of protein nanofibers produced by the application of electrospinning techniques have been reported. Anderson et al. have electrospun a series of silk-like protein polymers from formic acid and investigated their capacity to modify the cell adhesive characteristics of an underlying solid substrate [Anderson et al. *Bioactive Silk-like Protein Polymer Films on Silicon Devices*; Alper, M., Bayby, H., Kaplan, D. and Navia, M., ed.; Materials Research Society: Pittsburgh, PA; 1994, Vol. 330, pp. 171-177.

We describe herein fiber formation from natural elastin, a recombinant elastin mimetic polypeptide, from collagen and from gelatin. Electrospinning techniques were employed to produce fibers in a form that mimics native elastin fiber diameter utilizing an 81 kD synthetic elastin peptide polymer based upon the elastin-mimetic repeat sequence (Val-Pro-Gly-Val-Gly)₄(Val-Pro-Gly-Lys-Gly) (SEQ ID NO:4). The effects of process parameters on fiber morphology including solution viscosity, flow rate, electric field strength, and the distance between the spinneret tip and the collecting surface were defined. In addition, non-woven fabrics based upon this elastin analogue were produced, and component fiber properties, including the distribution of fiber diameter and orientation, were characterized. A framework has been established for investigating the influence of fiber processing on both the structural features and mechanical properties of single protein fibers and fiber networks formulated as non-woven fabrics. As a consequence, the capacity to engineer tissue like constructs whose mechanical and biological properties are based upon a hierarchical arrangement of protein networks has been significantly enhanced.

Initial investigations focused on defining the electric potential necessary to initiate or terminate jet formation from aqueous solutions of the elastin analogue. Overall, values for both V_{start} and V_{stop} were proportionately related to the concentration of the peptide in solution

5 and the corresponding viscosity (Fig. 1). V_{start} was greater than 6.4 kV for all concentrations tested, and the splay was found to be unstable above 25 kV. Therefore, 18 kV was the chosen field strength for subsequent fiber formation investigations. Jet instability was observed at concentrations above 20 wt%, with an accompanying inability to form fibers. A systematic study of the influence on fiber morphology of the distance between the spinneret tip and the
0 collecting plate revealed that 15 cm was an optimal distance for fiber formation.

The major determinants of fiber morphology are solution concentration and flow rate. Fibers formed from a 5 wt% solution, regardless of the mass flow rate, are short, fragmented and characterized by a triangular or spindle shaped beaded morphology (Fig. 2). Long
5 uniform fibers were generated at solution concentrations above 10 wt% which corresponded to solution viscosities greater than 25 centipoise (Fig. 3). Fiber diameters range between 300 and 400 nm over all flow rates tested with little variation in morphology with the infrequent exception of fiber splitting at triangle-shaped bifurcation points. At a flow rate of 100 $\mu\text{l}/\text{min}$, it was estimated that 1500 meters of thin filament were produced per minute. At solution
10 concentrations of 15 and 20 wt%, a new morphological pattern was noted: flattened or ribbon shaped fibers which appeared, on occasion, twisted during the spinning and deposition process (Figs. 4, 5). The formation of ribbon shaped fibers from the 20 wt% solution was a relatively common occurrence with an average fiber width of approximately 3.0 μm . However, both thin filaments (250-600 nm) and wider ribbon-like structures ($\sim 3 \mu\text{m}$) were observed together,
15 particularly when fibers from this solution were formed at low flow rates. Molecular-level microstructure was observed on the surface of elastin-like ribbons, characterized by aligned axially oriented ridges with an apparent height and width of 10 to 20 nm (Fig. 6). Although twisted ribbons were also examined by TEM, additional higher order structural features were not observed.

10 Fong et al. (1999) *Polymer* 40: 4585-4592, have reported that a solution viscosity of at least 500 centipoise was required for effective electrospinning of non-beaded fibers from aqueous solutions of high molecular weight poly(ethylene oxide) (MW 900 kD). In contrast, a relatively low viscosity solution (25 centipoise) of elastin peptide polymer yielded electrospun
15 fibers of uniform diameter. This phenomenon is believed to be related to molecular self-

5 assembly processes that are operative for the elastin analogue and, thereby, may be an
important determinant of thin filament and ribbon formation at low and high solution
concentrations, respectively. Urry et al. (1988) supra and (1989) supra have noted that the
central "Pro-Gly" element of the pentapeptide repeat (Val-Pro-Gly-Val-Gly) (SEQ ID NO:2)
adopts a type II reverse turn structure, forming a flexible helix or " β -spiral" on tandem
0 sequence repetition. Specifically, a conformational rearrangement from a random coil to a β -
spiral structure has been noted for model poly(VPGVG) (SEQ ID NO:2) peptides on phase
separation of the polymer. This conformation promotes both intra- and intermolecular
hydrophobic interactions and underlies the elastomeric restoring force in elastin. Therefore,
during the process of nanofiber formation, progressive solvent loss probably reduces the
5 inverse transition temperature of the peptide solution, facilitating both hydrophobically
mediated polypeptide folding and molecular self-assembly. Under appropriate conditions *in*
vitro, tropoelastin molecules have a well-known tendency to aggregate into thin filaments.
Likewise, the formation of elastin filaments *in vivo*, as basic building blocks of larger elastin
fibers, has been observed by atomic force microscopy and high resolution cryoelectron
0 microscopy [Pasquali-Ronchetti et al. (1995) *Ciba Foundation Symposium* 192: 31-50;
Pasquali-Ronchetti et al. (1998) *Matrix Biology* 17: 75-83]. These studies have demonstrated
that native elastin fibers can be resolved into a three-dimensional bundle of 7 nm wide
filaments oriented in the direction of the fiber. High resolution SEM of electrospun elastin
fibers revealed the presence of 10 nm wide filament-like surface folds running parallel to the
5 direction of the fiber. Given reported electrospinning strain rates on the order of 10^4 s^{-1} , it is
conceivable that elongational flow promotes the orientation and self-assembly of polymer
molecules in the direction of elongation [Reneker et al. (1995) *Bull Am. Phys. Soc.* 40: 351].

Non-woven fabrics were formed from fibers generated from a 15 wt% of polypeptide
0 solution at a flow rate of $150 \mu\text{l/ml}$ (Fig. 7). As noted above, short time frame deposition
studies had demonstrated that these conditions afforded the highest proportion of uniform, thin
fibers with diameters of approximately 400 nm. Image analysis of the non-woven fabric
revealed a unimodal distribution of fiber diameters with an observed average diameter of 450
nm (Fig. 8). The distribution of fiber orientation within this network followed a random
5 pattern of fiber deposition with consequent generation of an isotropic nonwoven fabric (Fig.

5 9). Uniaxial stress-strain properties were characterized in dry non-woven fabrics, and a representative data set is illustrated in Fig. 10. The ultimate tensile strength of the sample was 35 MPa and the material modulus 1.8 GPa. Hydration and peptide crosslinking modulate these properties.

0 Urry et al. have demonstrated that non-conservative amino acid substitutions for Valine-4 can be performed without disruption of the β -spiral structure [Urry et al. (1985) *supra*; Thomas et al. (1987) *supra*; Urry et al (1989) *supra*; Chang et al. (1989) *supra*]. Thus, the incorporation of lysine in the four position of the pentapeptide and subsequent synthesis of the elastin-mimetic repeat sequence (Val-Pro-Gly-Val-Gly)₄(Val-Pro-Gly-Lys-Gly) (SEQ ID NO:4)
5 permits spatially controlled chemical or enzymatic crosslinking [McMillan et al (2000) *supra*; Kagan et al. (1980) *J. Biol. Chem.* 255: 3656].

The genetic engineering of synthetic peptide polymers based upon a design derived from a native structural protein typically requires the incorporation of repetitive oligopeptide
10 sequences that impart critical structural properties from the parent protein to the recombinant polypeptide. In the process, model systems for investigating the structure-function properties of the native protein are generated. Moreover, genetic engineering based strategies facilitate the alteration of peptide chain length, consensus repeat sequence, as well as the introduction of additional functional groups or oligopeptide units that modulate the biological,
15 thermodynamic, and mechanical properties of the peptide polymer. For example, the appropriate choice of peptide sequence has led to the development of recombinant proteins that self-assemble into thermoreversible gels [Petka et al. (1998) *Science* 281:389-392], lyotropic smectic mesophases [Yu et al. (1997) *Nature* 389: 167-170], and lamellar crystallites [Krejchi et al. (1994) *Science* 265:1427-1432]. The uniformity of macromolecular structure achieved
20 by this approach provides exquisite control over macroscopic polymer properties, including processability. The successful generation of fibers from elastin-mimetic peptide polymers has provided a unique opportunity to characterize the physiochemical and biological properties of single fibers as well as structures with higher levels of architectural order. In particular, the creation of fiber-reinforced composites based upon a careful choice of protein polymer types

5 and network structures allows the engineering of improved human tissue constructs as well as completely synthetic artificial organs with enhanced clinical performance capabilities.

Elastin-mimetic protein fibers and fiber networks were produced by the electrospinning of an aqueous solution of a genetically engineered 81 kD peptide polymer based upon the repeat sequence (Val-Pro-Gly-Val-Gly)₄(Val-Pro-Gly-Lys-Gly) (repeats of SEQ ID NO:4).
0 Fibers were generated at ambient temperature and pressure with optimal fiber formation observed with use of an 18 kV electric field and a 15 cm distance between the spinneret and plate collector. High resolution SEM and TEM confirmed that fiber morphology was primarily influenced by solution concentration and mass flow rate. Characteristically, fiber
5 diameters varied between 200 - 3000 nm and three morphological patterns were noted: beaded fibers, thin filaments, and broad ribbon-like structures. At solution concentrations above 10 wt%, long uniform fibers were predominantly observed. Image analysis of non-woven fabrics produced from a solution concentration of 15 wt% revealed the isotropic orientation of individual fibers with an average fiber diameter of 450 nm. The ultimate tensile strength of
10 these non-woven fabrics was 35 MPa and the material modulus was 1.8 GPa.

In its native form, elastin is present as a network of elastic fibers that are crosslinked through available lysine residues found in interspersed alanine-rich regions [Robins, S. P. (1982) *Methods Biochem. Anal.* 28: 329-379; Miyoshi et al. (1976) *J. Biochem. (Tokyo)* 79: 1235-1243; Franzblau et al. (1977) *Adv. Exp. Med. Biol.* 79: 313-327; Akagawa, M. and Suyama, K. (2000) *Connect. Tissue Res.* 41: 131-141]. Characteristically, crosslinking occurs in the solid-state; that is, after cellular secretion of tropoelastin with local fiber deposition. In this fashion, the biostability of elastin is enhanced and its mechanical properties modulated. In contrast, crosslinking of synthetic elastin-mimetic protein polymers has been largely
10 investigated in solution phase systems using either γ -irradiation [Zhang et al. (1989) *J. Protein Chem.* 8, 173-182], chemical, or enzymatic based approaches [Kagan et al. (1980) *J. Biol. Chem.* 255: 3656-3659]. Urry et al. have demonstrated the feasibility of generating tubular hydrogels by γ -irradiation-mediated crosslinking [Urry et al. (1997) *supra*] and Welsh et al. have used glutaraldehyde to crosslink an elastin-mimetic protein film [Welsh, E. R. and
15 Tirrell, D. A. (2000) *Biomacromolecules* 1: 23-30; McMillan et al. (2000) *Macromolecules*

33: 4809-4821]. While these approaches provide a measure of control over the degree of crosslinking, the chemical nature, and the location of the crosslink are often ill-defined. Furthermore, none of these reaction schemes are appropriate for heterogeneous multicomponent systems in which there may be a need to control either the degree of crosslinking among individual constituents or otherwise to incorporate elements within the structure that may be adversely effected by unintended side reactions. In summary, the approaches that have been described to date have provided important insights into the physiochemical behavior of bioelastic systems under a variety of environmental conditions and have lead to novel processing strategies for creating elastomeric hydrogels for drug delivery and other applications. However, we believe that the generation of meaningful constructs for the engineering of human tissues and artificial organs will require the processing of elastomeric protein polymers into fibers and fabrics in which the protein polymer forms a crosslinked network. Thus, it is desirable to utilize a crosslinking strategy that is efficient in the solid-state, achieves precise control over the nature and degree of crosslinking, and facilitates spatial and temporal control over the reaction process.

We have optimized an electrospinning process to produce uniform nanofibers ($d < 1 \mu\text{m}$) and non-woven fabrics of an elastin protein polymer poly((Val-Pro-Gly-Val-Gly)₄(Val-Pro-Gly-Lys-Gly))₃₉, 39 repeats of SEQ ID NO:4. Notably, amino acid substitution in the fourth position of the pentapeptide does not affect the formation of a β -spiral [Huang (2000) *Macromolecules* 33: 2989; Thomas et al. (1987) *Biopolymers* 26: 921-934; Chang et al. (1989) *J. Biomolec. Struct. Dyn.* 6: 851-858; Urry et al. (1989) *Biopolymers* 28: 819-833], which is critical for the biomechanical behavior of elastin analogues. The incorporated lysine group at position 24 within the repeat of SEQ ID NO:4 (Lys-24) provides an amino functionality that can be conveniently utilized for polymer crosslinking. Indeed, McMillan et al. have recently reported the formation of structurally well-defined crosslinked elastin-mimetic hydrogels using an *N*-hydroxysuccinimide ester of a bifunctional carboxylic acid, specifically, disuccinimidyl suberate, as crosslinker of available amino groups in the solution phase [McMillan et al. (1999) *Macromolecules* 32: 9067-9070]. Herein we describe the incorporation of functional groups into the protein polymer backbone that facilitate site-specific solid-state photocrosslinking using either UV or visible light active photoinitiators. Significantly, this approach provides for both

5 spatial and temporal control over the crosslinking reaction. The generation of crosslinked elastin-mimetic fibers and films is reported, and mechanical properties characterized.

The synthesis of acrylate-modified elastin-mimetic polypentapeptide has been accomplished. ¹H NMR spectra of the elastin-mimetic protein polymer and its acrylate-modified analogue (AME) recorded at room temperature in D₂O are shown in Fig. 11A-11B. The spectrum of the modified material expanded between 5.0 and 5.7 ppm is shown in the inset in Fig. 11A. The spectrum clearly indicates the incorporation of the double bonds through peaks at 5.3 (H^a) and 5.6 ppm (H^b). Fig. 11B is the expanded version of the spectra, between 2.6 and 3.1 ppm. Acrylate modification results in about 0.25 ppm (H^d) downfield shift for the methylene protons alpha to the amino group (H^c). This shift can be used to directly calculate the degree of functionalization (DOF). The ratio of the integrated intensity of the 3 ppm peak to the sum of the integrated intensities of the 3 and 2.75 ppm peaks defines the DOF. Additionally, IR spectroscopy can be used to evaluate DOF. The NH₂ band at 3500 cm⁻¹ decreases with functionalization.

The DOF can be varied by changing the molar reactant ratio of the methacryloyl anhydride to the amino groups in the peptide polymer. Fig. 12 illustrates the variation in the DOF that can be achieved, as demonstrated by changes in peak intensities in the ¹H NMR spectrum. In the unmodified material the 3 ppm peak is absent. As the molar ratio of the anhydride is increased, the intensity of the 3 ppm peak increases at the expense of the 2.75 ppm peak, indicating an increased degree of functionalization. The DOF can be varied from 33 % to 88 % by changing the feed ratio from 1:1 to 3:1. Thus, using the same reaction scheme a wide variety of AMEs can be produced, resulting in materials having a wide range of mechanical properties (subsequent to crosslinking). For the remainder of the discussion, the AMEs will be represented by their respective DOF in brackets.

The inverse temperature transition (T_i) of elastin-mimetic and acrylate-modified analogues has been analyzed. Mutual compatibility of a polymer and a solvent has been extensively studied and is often critical for processing needs. Urry et. al. have shown that a family of protein polymers based on the VPGVG (SEQ ID NO:2) repeat undergo an inverse

5 temperature transition [Urry et al. (1985) *Biopolymers* 24: 2345-56]. On increasing the temperature from below to above the transition temperature, the proteins were found to undergo molecular assembly by protein folding with phase separation. For example, poly(GVGVP) is miscible with water in all proportions below 25°C, but on increasing the temperature above 25 °C, the solution becomes turbid with complete phase separation. Thus, 0 temperature-dependent turbidimetry measurements can be used to quantify the inverse transition temperature.

Results of turbidimetry measurements on elastin and acrylate-modified elastin materials in ddH_2O are shown in Fig. 13. The temperature corresponding to one-half maximal turbidity 5 can be considered the T_i . The data demonstrate that acrylate-modification causes a reduction in the inverse temperature transition with 88% conversion of the amino groups, producing a reduction in the transition temperature by about 50 °C ($T_i \sim 23^\circ\text{C}$). This reduction is consistent with the T_i -based hydrophobicity scale developed by Urry et. al. [Urry et al. (1985) *Biopolymers* 24: 2345-56]. Their investigations established that an increase in the 10 hydrophobicity of model protein polymers, as a result of substitution at the fourth position, is thermodynamically offset with a decrease in the transition temperature. The measurement of T_i assumes particular importance in our studies, because the processing temperature for fiber formation is dictated by T_i . The phase separation phenomenon occurring above T_i precludes fiber formation. For example, in principle, fibers can be spun from aqueous solutions of 15 AME(33) and AME(65) at room temperature, which is well below the T_i . However, the onset of turbidity begins close to room temperature for AME(88). Thus, fibers from 10-15 wt% AME(88) in water (pH 7) required cold room spinning (at about 5 °C).

The crosslinking of the acrylate moiety is mediated through a photoinitiator. The 20 mechanism for photocrosslinking has been extensively reviewed [Eaton, D. F. (1986) *Advances in Photochemistry* 13: 427-487]. Because fiber spinning is conducted from aqueous solutions, water-soluble photoinitiators are desirable. Two photoinitiators were investigated: eosin Y/triethanolamine/vinyl pyrillidone system and IRGACURE 2959 (Irgacure 2959 is 1-[4-hydroxyethoxy)-phenyl]-2-hydroxy-2-methyl-1-propane-1-one; Ciba Geigy), both of which have 25 been used as photoinitiators in water-based systems [Van Den Bulcke et al. (2000)

5 *Biomacromolecules* 1: 31; Cruise et al. (1998) *Biotechnol. Bioeng.* 57: 655-65]. While both
photoinitiators were tested for crosslinking efficiency, the reported mechanical results are for
the EY-based systems. Other photoinitiators which function under mild conditions of
temperature and without producing a level of free radicals which lead to protein damage can
be used, and the selection of light wavelength and temperature for a particular combination of
0 wavelength and functional group are well understood in the art.

Figs. 14 and 15 show SEM micrographs of the fibers produced from 10 and 15 wt%
solutions at a flow rate of 50 μ l/min, as described in Example 4. In both cases, long uniform
fibers were produced. In fibers spun from the 10 wt% solution, average diameter ranged
5 between 300 – 500 nm with occasional triangle shaped bifurcation points noted. In contrast,
fibers spun from the 15 wt% solution were exhibited a flat or ribbon type morphology with the
absence of triangular bifurcation points. In comparison to our previous investigation of
unmodified elastin-mimetic fibers, neither acrylate-modification nor the addition of
photoinitiator to the spinning solution had any appreciable effect on fiber morphology.

10 Solubility in water was used as a simple test to determine the efficiency of crosslinking.
While elastin samples that did not contain photoinitiator dissolved completely in water, those
containing Eosin Y or Irgacure were insoluble in water. The extent and nature of crosslinking
was more precisely determined using ^{13}C solid-state NMR. Owing to its inherent structural
specificity, solid-state NMR has been extensively used in the past to study chemical changes
15 ensuing after crosslinking [O'Donnell, J. H. and Whittaker, A. K. (1992) *Radiat. Phys. Chem.*
36: 209; O'Donnell, J. H. and Whittaker, A. K. (1992) *J. Polym. Chem. Ed.* 30: 185]. Fig.
16 shows the ^{13}C solid-state MAS/TOSS NMR spectra of elastin, elastin methacrylamide, and
crosslinked elastin methacrylamide. The addition of double bonds to elastin via
methacryloylation is clearly evidenced by the appearance of peaks C^{a} and C^{b} in the spectrum
20 of elastin methacrylamide. For the sake of clarity, the double bond region is magnified and
shown as an inset along with the elastin methacrylamide spectrum. The spectra for samples
crosslinked either by Eosin Y or Irgacure show the complete disappearance of the double bonds
and appearance of new peaks corresponding to the photoinitiator labeled as "*". For the

5 irradiation time employed, solid-state NMR spectra confirm complete crosslinking. No evidence of crosslinking was detected in the absence of photoinitiator.

The dependence of protein crosslinking on irradiation time was investigated in detail for the 15 wt% AME(88)/EY system. Samples were irradiated for up to 60 minutes, lyophilized in the dark, and stored at -20 °C in brown bottles to avoid light exposure prior to solid-state NMR analysis. The double bond region (peaks C^a and C^b) were integrated for each sample and the integrated double bond areas were normalized with respect to that of the unirradiated sample. Fig. 18 shows the degree of crosslinking as a function of irradiation time. After an hour of visible light irradiation, the crosslinking process was complete. Increased variability of experimental data obtained at higher degrees of crosslinking was attributed to decreasing signal to noise ratio in the integrated region.

The crosslinked and the uncrosslinked samples were subject to tensile testing to determine the mechanical effect of crosslinking. Fig. 17 shows representative stress-strain curves of the two samples. The uncrosslinked material (elastin methacrylamide) had a modulus of 0.7 ± 0.15 GPa and a tensile strength of 16.2 ± 6.3 MPa, while the crosslinked sample had a modulus of 1.8 ± 0.4 GPa and a tensile strength of 43.3 ± 5.2 MPa. As anticipated, crosslinking enhanced both Young's modulus and tensile strength with a concomitant decrease in the strain to failure from 3.9 ± 0.2 % to 2.1 ± 0.35 %. In the dry state, crosslinking renders the sample stiffer and more brittle as compared to the uncrosslinked sample. Fig. 18 shows the comparative stress-strain behavior of dry and hydrated crosslinked samples of AME(65). Clearly rubber elastic behavior ensues subsequent to hydration. The hydrated sample had an average modulus of 0.45 ± 0.08 MPa and a strain to failure of 105 ± 8 %. Notably, the degree of crosslinking estimated from ideal rubber elasticity theory compares well with that obtained from solid-state NMR.

45 min of irradiation -> calibration curve -> 75% x 0.65

In summary, post processing solid-state crosslinking of elastin-mimetic fibers was investigated. Through available lysine residues, an elastin-mimetic protein polymer was modified to incorporate an acrylate moiety. The degree of acrylate functionalization could be

5 varied by changing the reactant ratio of anhydride to elastin. The AME's were found to have lower inverse transition temperature than the unmodified sample. This was attributed to the increase in the hydrophobicity of the sample with the introduction of the acrylate group. The inverse transition temperature in turn dictated the temperature for fiber formation. Fibers and fabric samples of AME were prepared by electrospinning at appropriate temperatures.
0 Depending upon the concentration of the solution, fibers with diameter ranging from 300 nm to 1.5 μm were produced. The fibers were subsequently crosslinked using photoirradiation.

The insolubility of the resulting sample in water indicated a high degree of crosslinking with complete crosslinking confirmed by ^{13}C solid-state NMR. The mechanical properties of
5 the samples were commensurate with that expected, in that modulus and tensile strength increased upon crosslinking. Moreover, hydrated samples displayed rubber-like behavior with high extensibility. Thus acrylate modification provides a viable route for solid-state crosslinking of elastin-mimetic protein-based materials. With the production of crosslinked elastin-mimetic fabrics, the capacity to engineer tissue-like constructs has been significantly
0 enhanced.

Collagen is a biodegradable, biocompatible, and non-immunogenic structural protein, which makes it a suitable compound for a variety of biomedical applications. Examples include collagen use in cosmetic and urological surgery as an injectable compound for tissue
5 augmentation, in orthopedic surgery as an implantable matrix to promote bone growth, and in plastic and general surgery as a topical agent for the treatment of both chronic non-healing wounds and burn injuries or as a template for tissue regeneration. The most abundant form of collagen isolated from adult connective tissues, such as skin, tendon, and bone, is type I collagen. Characteristically, it is composed of two $\alpha 1(\text{I})$ chains and one $\alpha 2(\text{I})$ chain, each
10 slightly more than 1000 amino acids long, that are organized as a triple helix and stabilized primarily by hydrogen bonds. A single molecule of type I collagen has a molecular mass of 285 kD, a width of $\sim 14 \text{ \AA}$, and a length of $\sim 3000 \text{ \AA}$. As a biomaterial, collagen has been predominantly used after processing into a dry powder or slurry, a hydrogel after solution phase crosslinking, or as a porous matrix with or without the addition of other components
15 after freeze-drying. However, in native connective tissues, type I collagen molecules form

5 fibrillar elements, twenty to several hundred nanometers in diameter that are organized into protein networks of varying architecture. Functionally, collagen fiber networks act to resist high strain deformation and in the process transmit forces, dissipate energy, and prevent premature tissue mechanical failure. These fiber networks constitute the principle structural elements of a variety of acellular bioprosthetic tissue substitutes, such as porcine heart valves and bovine artery heterografts, as well as other tissue derived matrices, including porcine subintestinal submucosa and bovine pericardium. The versatility of collagen as a scaffold for tissue engineering applications is significantly enhanced when used as a native protein network. To date, attempts to reformulate tissue extracted native collagen into protein fiber networks and fabrics have been limited.

5 PEO is non-toxic, chemically stable in acidic solution, and when of sufficient molecular weight is capable of forming electrospun fibers. Significantly, fibers could not be formed from a 1-2 wt% pure collagen in aqueous solution, but were observed after the addition of PEO. High resolution SEM demonstrated unique morphological features as a function of the weight ratio of PEO to collagen, as well as solution conductivity and flow rate. Solution viscosity as related to PEO content and the effect of sodium chloride concentration on solution conductivity are summarized in Tables I and II. The effect of the collagen:PEO ratio on tensile strength and modulus is shown in Table III. Increasing the concentration of PEO increased the yield of uniform fibers, while reducing bead formation. Beads predominated at collagen-PEO weight ratios of 10:1 and 5:1, with only rare beads noted at a ratio of 1:1 and none observed at a collagen-PEO ratio of 1:2. Under this condition, uniform fibers were produced with diameters ranging between 50 - 150 nm. The formation of beads has been attributed to jet instability, which is believed reduced upon increasing solution viscosity due to addition of high molecular weight PEO. Likewise, solution conductivity was also found to influence fiber formation. When an electric field is applied to an electrolyte-containing aqueous polymer solution, field induced ion movement carries the solution along by an additional viscous drag force. This phenomenon enhances jet stability and, as a consequence, reduces bead formation. While fiber uniformity increased with the addition of sodium chloride, crystal formation was observed at high salt concentrations (Figs. 19A-19F). Finally, we observed that small changes in flow rate had a marked impact on collagen/PEO fiber morphology. Below 100 $\mu\text{L}/\text{min}$,

5 bead formation was increasingly pronounced, while at flow rates above this level, the limited volatility of the polymer solution prevented adequate fiber drying under conditions of ambient temperature and pressure. TEM imaging confirmed HRSEM analysis and did not reveal any additional internal structural features. See Figs. 19A-19D.

0 We determined the microphase structure of collagen-PEO blends by solid-state NMR. The dipolar magnetization transfer method depends on creating a magnetization gradient across the sample and then monitoring the time it takes for spin equilibration to occur following the creation of the gradient. This equilibration time will depend upon the domain sizes in the system and the spin diffusion coefficients associated with each phase. If the diffusion
5 coefficients of different regions and the dimensionality of the diffusion process are known *a priori*, then the domain sizes in the system can be extracted by fitting a simulated diffusion profile to the experimental data. The simulated profile can be obtained by numerically solving the diffusion equation with appropriate initial and boundary conditions. It is also clear that if diffusivities are isotropic, then only the minimum domain distances will be probed since the
0 shortest path for the establishment of spin equilibration lies along this direction (D. L. Vanderhart (1990) *Makromol. Chem., Macromol. Symp.* 34: 125). The domain distances that can be observed using spin diffusion range from about 2 nm to 100 nm. The upper bound for the observable domain distance will depend upon the time in which it is possible to observe the magnetization polarization. This is governed by the spin lattice relaxation of protons in the
5 sample. Though there is a limitation on the maximum domain distance observable, there are many multiphase polymer systems that exhibit domains of the order that can be investigated by the spin diffusion technique. For example, long periods in semicrystalline polymers and domain sizes in many block copolymers fall well within the range of detection by spin diffusion [K. J. Packer et al. (1984) *J. Polym. Sci.: Polym. Phys.* 22: 589; Kimura et al (1992) *Polymer*
0 33: 493; Cai et al. (1993) *Polymer* 34: 267].

Collagen fibers were spun and cross linked into fibers using collagen dissolved in fluorinated solvent or dissolved in a water-fluorinated solvent mixture. Although collagen fibers could not be produced from 1-2 wt% solutions in water, either changing the temperature
15 or altering the solvent system can produce pure collagen fibers. By increasing the temperature

5 to 36 °C formation of collagen fibers were noted. Fluorinated alcohol/water mixtures can serve as alternate solvents systems to produce collagen fibers. For example production of collagen fibers in the 300-800 nm diameter range could be achieved from spinning 10-15 wt% of collagen in such fluorinated solvents. The solvent compositions used were (a) 10 mole% trifluoroethanol (TFE)/90 mole% water and (b) 10 mole % hexafluoroisopropanol (HFIP)/90
0 mole% water. Collagen spinning can also be effected from combinations of water with other fluorinated alcohols.

The most important step in the spin diffusion experiment is the creation of the magnetization gradient. The magnetization gradient is usually realized by using an appropriate
5 selection sequence. For multiphase systems that display a large gradient in mobility between constituent phases, a simple filter based on spin-spin relaxation (T_2) can be used to selectively retain the magnetization of the more mobile phase. For example, consider a blend of two components A and B with disparately different T_2 's. If A has a T_2 of 100 μ s and B has a T_2 of 1 ms, then by applying a T_2 filter of 700 μ s, one can destroy the magnetization in A and
10 selectively retain the magnetization in B, thereby creating a magnetization gradient. This is the basis of the Goldman-Shen experiment and many variations thereof that have been used to probe domain distances in polymer blends [US Patent No. 5,911,942 (1999)]. For the system under consideration, the two components, PEO and collagen, have very different T_g 's ($T_{g, \text{Collagen}} \sim 125$ °C and $T_{g, \text{PEO}} \sim -65$ °C) and are hence amenable for investigation via the mobility-based
15 approach. The simple T_2 filter was replaced with a dipolar filter selection sequence. The dipolar filter was selected since it provides greater tunability and has been presented as a technique that can overcome spectral distortions produced by multi-quantum effects that are prevalent at short spin diffusion times [Egger et al. (1992) *J. Appl. Poly. Sci.* 44: 289].

10 Fig. 21 shows the CP/MAS/TOSS and DP/MAS spectra of collagen, PEO and an electrospun fabric of 1:2 collagen/PEO. The CP spectrum of the collagen/PEO fabric appears to be a simple superposition of the CP spectra of collagen and PEO in that it shows the resonances from both collagen and PEO. The DP spectra typically discriminate against the more rigid regions in the sample. The DP spectrum of collagen (not shown) indicates that it
15 is very rigid at the measuring temperature (24 °C). The reported glass transition of dry

collagen is approximately 125 °C rendering collagen rigid at room temperature. The DP spectrum of PEO (not shown) indicates that PEO is highly mobile at room temperature (T_g , PEO - 65 °C). In the case of the collagen/PEO fabric the DP spectrum clearly shows that PEO is highly mobile when compared to collagen. This vast difference in mobility between collagen and PEO can be exploited in terms of a ^1H dipolar magnetization transfer experiment to provide information about the domain sizes in the fabric.

The most important step in the spin diffusion experiment is the establishment of the initial magnetization gradient. Fig. 22A shows the ^1H spectra of an electrospun 1:2 collagen-PEO fabric before and after the application of the dipolar filter. The spectrum acquired before the application of the filter is a superposition of a broad (rigid) and a narrow (mobile) component. The spectrum acquired after the application of the filter shows only the narrow component indicating that the filter has destroyed the magnetization associated with the rigid regions. In order to ascertain the chemical identity of the regions selected after the application of the filter, a CP/MAS sequence was appended to the spin diffusion sequence as described in the experimental section. The ^{13}C CP/MAS spectra are shown in Fig. 22B. It is clear from the CP/MAS spectra that the filter selectively retains magnetization in the more mobile PEO regions while destroying the magnetization in the more rigid collagen regions. Thus the chosen filter parameters result in an efficient establishment of magnetization gradient in the sample. Similar results were obtained with a 1:1 fabric sample.

The spin diffusion data for 1:1 and 1:2 fabric blends are shown in Fig. 23. The inset in Figure 7 shows the initial time data. From the inset it is clear that the magnetization in the source phase contacts the sink phase slower in the 1:1 blend than in the 1:2 blend (the initial portion of the curve for the 1:1 blend is sigmoidal while it is linear for the 1:2 blend). This is indicative of the presence of an interface in the 1:1 blend while there is very little or no interface in the 1:2 blend. The formation of an interface in the case of the 1:1 blend is not surprising since the potential exists for hydrogen bonding between the ether oxygen of the PEO and protons of the amino group in collagen. The presence of associative interactions has known to produce phase mixing in polymer blends. Thus, mere visual inspection of the initial

5 time data suggests that mechanically stronger fabrics could be produced from the 1:1 blend due to the presence of an interface.

The dotted lines in the figure represent the theoretical (expected) end value of spin diffusion. As expected the theoretical end value for the 1:2 blend (0.74) is greater than the 1:1 blend (0.59) since more of the mobile phase is available for selection in the 1:2 blend. These theoretical values are calculated assuming that the entire PEO phase is available for selection. However it must be borne in mind that PEO is capable of crystallizing in the blend. Crystallization of PEO accounts for the difference between the observed and expected end values of spin diffusion. Crystallization of the source phase results in the lowering of the expected end value. From the observed end values it becomes evident that the 1:2 blend has a higher degree of crystallinity than the 1:1 blend. Indeed DSC experiments conducted on the electrospun fabrics show that the degree of crystallinity in the 1:2 blend is around 36% while that in the 1:1 blend is 12%. From these data it can be surmised that crystallization induced phase separation occurs in the 1:2 blend precluding the formation of a substantial interface.

Non-woven fabrics were formed from collagen/PEO fibers generated from a 2 wt% of type I collagen-PEO solution at a flow rate of $100\mu\text{L}/\text{mL}$ and uniaxial stress-strain properties characterized in the dry state. A pure PEO fabric sample had the lowest tensile strength of 90 KPa and a modulus of 7 MPa. The tensile strength and modulus of a 1:2 collagen-PEO blend were 270 KPa and 8 MPa, respectively. Maximum values were observed for the 1:1 blend with a tensile strength of 370 KPa and a modulus of 12 MPa. NMR analysis, as reported above, suggested that the superior mechanical properties, observed for collagen-PEO blends of weight ratio 1:1, were due to the maximization of intermolecular interactions between the PEO and collagen components.

Type I collagen-PEO fibers and non-woven fiber networks were produced by the electrospinning of a weak acid solution of lyophilized collagen purified from rat tail tendon. Fibers were generated at ambient temperature and pressure with optimal fiber formation observed with use of an 18 kV electric field and a 15-cm distance between the spinneret and plate collector. Fiber morphology was influenced by solution viscosity, conductivity, and flow

5 rate. As determined by high-resolution SEM and TEM, highly uniform fibers with a diameter range of 100 – 150 nm were produced from a 2 wt% solution of collagen-PEO (1:1 weight ratio, 34 mM NaCl) at a flow rate of 100 μ L/min. The ultimate tensile strength of the resulting non-woven fabric was 370 KPa with an elastic modulus of 12 MPa.

0 Efforts to process collagen into man-made fibers have been limited, and generally approaches to date have been confined to wet spinning methodologies. Wet spinning involves the extrusion of a protein solution through a spinneret into an acid-salt coagulating bath, which usually contains aqueous ammonium sulfate, acetic acid, isopropanol, or acetone. Further treatments in ethanol and acetone solutions are often required for fiber dehydration.
5 Limitations of this approach include the use of biologically toxic solvent systems that preclude the fabrication in real time of hybrid protein-cell constructs, as well as conditions which likely induce significant conformational changes in native protein structure, including protein denaturation. Finally, wet spinning is largely confined to the generation of fibers that range from tens to hundreds of microns in diameter. In contrast, the process outlined herein provides
0 a convenient, non-toxic, non-denaturing approach for the generation collagen-containing nanofibers and non-woven fabrics that have applications in medical and veterinary prostheses, artificial organs, wound healing and tissue engineering, and as hemostatic agents.

Bioconjugate techniques involving the manipulation of various amino acid side chain
5 residues have become commonplace in modern biochemistry. Our strategy involved the covalent attachment of an acrylate moiety to lysine and hydroxylysine side chains. Via nucleophilic attack, methacryloyl anhydride was used to acylate the Σ -amino group of the lysine and hydroxylysine residues. Once modified, the gelatin was crosslinked using eosin-Y/
triethanolamine/ 1-vinyl-2-pyrrolidinone free radical photoinitiation [Cruise et al. (1998) supra].

0 By using the technique of electrospinning [Reneker, (1996; supra; Huang (2000) supra], we formed fibers with diameters in the nanometer range (<1 μ m). These sizes have been reported to closely approximate fiber morphology through out much of the extracellular matrix. [Birk, 1991 #10] By spinning acrylate-modified gelatin into various constructs (i.e. sheets and tubes)

5 and subsequent crosslinking, an integrated protein matrix structure can be formed in an expeditious and precise manner.

Fig. 24 shows the ^1H NMR spectra of gelatin and acrylate modified gelatin in D_2O recorded at 45 °C. Incorporation of double bonds in the system can be inferred from the presence of two new peaks in the spectrum of gelatin methacrylamide. Integrating the double bond region provides a measure of the degree of functionalization (DOF). DOF was defined as the ratio of the amino moieties functionalized to the total number of amino moieties in the gelatin prior to functionalization. In this case the DOF was calculated be around 73 %. It has already been shown by Van de Bulcke et. al (vide infra) that the DOF could be varied by changing the methacryloyl anhydride to the gelatin ratio. A range of gelatin-based materials with different DOF's can be obtained using this reaction.

Acrylate functionalized gelatin was processed into films to examine the effect of crosslinking on mechanical properties. The film samples for the study were prepared according to the procedures outlined hereinbelow. The effects of photoinitiator concentration and irradiation time on the crosslinking process were investigated. The results of these studies could then be used to optimize the crosslinking conditions during fiber production. Crosslinking optimization studies were performed on film samples since they were much easier to process than the fiber samples.

For the first study three samples were prepared. The concentration of gelatin methacrylamide was the same in each of the three samples while the photoinitiator concentration was varied from standard to high. The solvent was allowed to evaporate and the film samples were formed. The dry films were exposed to an hour of irradiation using a Dynalume visible light source at $70\text{mW}/\text{cm}^2$. The sample was cut into strips for tensile testing. The studies were then performed on the hydrated samples. Eight samples were tested for each photoinitiator concentration.

Fig. 25 shows the stress-strain data for crosslinked gelatin methacrylamide films with varying photoinitiator concentration. Going from the standard to medium photoinitiator

5 concentration provides a moderate increase in modulus while significantly decreasing the strain to failure. However, going from medium to high photoinitiator concentrations decreased the modulus slightly. Hubell et. al have previously reported that the photopolymerization process can be adversely affected by increasing the concentration of TEA. Increased TEA concentrations are believed to lead to more radicals being generated, and these radicals in turn
0 can react and terminate the process. However, increasing VP concentration negates the effect of increasing TEA concentration by providing more sites where the photo-generated radicals can attack. The potentially negative effect of increased TEA concentration is overcome by increased VP concentration at medium photoinitiator concentration. However at the high concentration conditions, the TEA effect dominates, leading to a decrease in the modulus. In
5 going from standard to medium concentration the gain in the modulus was not appreciable. Moreover, it is desirable to use as little of the photoinitiator as possible to achieve the desired level of crosslinking. Accordingly, it was decided to use the standard concentration for the remainder of the study.

10 To study the effect of irradiation time on the degree of crosslinking, seven 5 wt% gelatin methacrylamide solution samples were prepared. Each sample was irradiated by a visible light source for varying lengths of time starting from ½ hour to 3 ½ hours. Fig. 26 shows the ultimate tensile strength, modulus, and strain to failure of hydrated samples as a function of irradiation time. The ultimate tensile strength and the modulus increased with
15 increasing irradiation times while the strain to failure decreased. No significant change in the mechanical properties is observed past two hours of irradiation. The mechanical data indicate that two hours of visible light irradiation is sufficient to complete the crosslinking reaction in the conditions described herein.

20 To ascertain whether the reaction had gone to completion, ¹³C solid-state NMR spectroscopy was conducted on the samples from the same batch that was used for tensile testing. The crosslinked sample was irradiated for two hours. The ¹³C CP/MAS/TOSS spectra of gelatin methacrylamide and crosslinked gelatin methacrylamide is shown in Fig. 27. The gelatin methacrylamide spectrum shows two resonances due to the double bond carbons.
25 However, in the spectrum of the crosslinked material these resonances have completely

5 disappeared, indicating that the crosslinking reaction has gone to completion. When the NMR data is taken in conjunction with the mechanical data, it conclusively shows that crosslinking is complete for the given DOF in two hours. Although time consuming, solid-state NMR can be used to map the degree of crosslinking as a function of irradiation time. An approximate degree of crosslinking can be calculated using the rubber elasticity theory. According to the theory the modulus is given by

$$E = 3 \rho R T / M_c$$

where E is the modulus, ρ is the density, R the gas constant, T the temperature, and M_c the average molecular weight between crosslinks. M_c can be calculated from the measured modulus (from the tensile testing experiments) and this quantity is inversely proportional to the degree of crosslinking. Thus degree of crosslinking is directly proportional to the modulus of the material. Thus modulus measurements can also be used to provide a rough estimate of the degree of crosslinking. Natural elastin has a modulus of about 0.9 to about 1.1 MPa. Calculations show that about 50 to about 75% cross linking is needed in the crosslinked modified elastin or elastin mimetic in order to mimic the elastic modulus of native arterial elastin. An IR spectroscopic analysis, especially with respect to the C=C stretch at 1650-1680 cm^{-1} of the methacrylamide-functionalized elastin led to an estimate of the % of cross linkage (based on Peak deconvolution) at about 53 to 64%.

Electrospinning was also used to produce acrylate modified fibers and fabric networks of crosslinked gelatin. The description of the apparatus has been provided in detail in the previous section. The field strength, deposition distance and flow rate were kept constant at 18 kV, 10 cm, and 30 $\mu\text{L}/\text{min}$ respectively. 18-kV field strength and 10-cm deposition distance seemed to provide the best fiber splays, while increasing the flow rate beyond 30 $\mu\text{L}/\text{min}$ lead to the formation of droplets. Fibers formed from both unmodified gelatin and acrylate modified gelatin using the aforementioned parameters were analyzed with scanning electron microscopy to delineate their morphology. The concentration of gelatin in solution was found to be the major variable affecting fiber morphology.

SEM micrographs of unmodified gelatin fibers electrospun from a 25 wt% solution show that uniform fibers in the 200-500 nm diameter range were produced. For SEM

5 examination of fibers spun from 15 and 20 wt% solutions of acrylated gelatin containing standard concentration of the photoinitiator, the fibers formed from the 15 wt% solution showed significant beading. Beading in electrospun fibers is undesirable and lead to poor mechanical properties. Reneker et. al have reported that addition of NaCl to the solution mixture decreases the beads formed during electrospinning. However, the fibers formed from 10 the 20 wt% solution of gelatin methacrylamide showed lesser propensity to form beads when compared to fibers formed from the 15 wt% solution. Although spinning experiments have not been carried out on 25 wt% solutions of the acrylated gelatin, the fibers formed from 25 wt% unmodified gelatin in water suggest that increasing concentration will yield non-beaded fibers obviating the need for the addition of NaCl or any other salt. The fiber diameters in case 15 of the acrylate modified samples were in the 500 to 1500nm diameter range. The significant increase in the fiber diameter in the acrylated fibers is due to bead formation.

Electrospinning for extended periods of time will yield a nonwoven fabric network that consists of nano-diameter fibers. However, if a rotating mandrel is used instead of a plate, a 20 nonwoven tube of crosslinked gelatin can be produced. Fig. 29A shows a nonwoven tube of crosslinked gelatin, 5 cm in length and 14 mm in diameter. The diameter of the tubes can be varied by increasing or decreasing the size of the mandrel. Fig. 29B also shows the tube in the hydrated state (i.e., immersed in water). The tube retains its shape even after prolonged immersion in water, indicating that the crosslinking reaction has proceeded to completion. 25 Thus using the electrospinning method and the chemistry outlined one can begin to form constructs, which may have applications in the medical field.

The network porosity of the nonwoven fabrics was measured using pulsed field gradient NMR spectroscopy (PFGNMR). In the case of free diffusion through Brownian motion, a 30 concentration gradient initially having the form of a pulse will gradually become Gaussian with time. However in case of diffusion in a confinement or pore, the concentration profile does not become Gaussian due to the limitation imposed by the pore boundaries. At a time when the diffusion profile in the pore becomes independent of time, it becomes a measure of the pore radius or size if the self diffusion coefficient (D) of the fluid is known *a priori*. PFGNMR 35 utilizes this concept for the measurement of pore sizes.

Fig. 29A shows the diffusion profiles measured as a function of the magnetic field gradient strength (G) for varying lengths of time. It can be observed that the profiles measured at 800 ms and 1000 ms are almost similar indicating that the diffusion profile has equilibrated with time. Thus, the 1000-ms diffusion profile can be used to determine the pore size. In Fig. 29B the normalized intensity is plotted as a function of a parameter α^2 that is given by

$$\alpha^2 = \frac{\gamma^2 \delta^2 G^2}{5}, \text{ where } \gamma \text{ is the gyromagnetic ratio, } G \text{ the magnetic field gradient and } \delta \text{ is the}$$

time between gradients. In the case where the pore sizes are uniform, a plot of normalized intensity versus α^2 would be linear with a slope that is related to the pore size. It is clearly seen from the figure that the plot is nonlinear suggesting a distribution of pore sizes. In order to determine an average pore size one can use any distribution that is realistic and fits the data well. In this case we have employed a Gaussian distribution of pore sizes. The mathematical relationship between the diffusion profile and the pore radius in the case of a Gaussian distribution of pore sizes has already been determined by Callaghan et. al.

$$\ln \frac{I(G)}{I(G=0)} = -\alpha^2 R_0^2 [1 + \sigma^2 \alpha^2]^{-1} - \frac{1}{2} \ln [1 + \sigma^2 \alpha^2] \quad (1)$$

where R_0 is the mean pore radius, and σ^2 is the twice the variance of the distribution. Figure 10(b) shows the fit using (1) to the 1000-ms data. Nonlinear optimization module of Mathematica software was used for fit. From the fit, an average pore size of 73.4 μm with a standard deviation of 33.6 μm was obtained.

Monoclonal or polyclonal antibodies, preferably monoclonal, specifically reacting with a particular protein of interest may be made by methods known in the art. See, e.g., Harlow and Lane (1988) *Antibodies: A Laboratory Manual*, Cold Spring Harbor Laboratories; Goding (1986) *Monoclonal Antibodies: Principles and Practice*, 2d ed., Academic Press, New York.

Standard techniques for cloning, DNA isolation, amplification and purification, for enzymatic reactions involving DNA ligase, DNA polymerase, restriction endonucleases and the like, and various separation techniques are those known and commonly employed by those skilled in the art. A number of standard techniques are described in Sambrook et al. (1989)

5 *Molecular Cloning*, Second Edition, Cold Spring Harbor Laboratory, Plainview, New York; Maniatis et al. (1982) *Molecular Cloning*, Cold Spring Harbor Laboratory, Plainview, New York; Wu (ed.) (1993) *Meth. Enzymol.* 218, Part I; Wu (ed.) (1979) *Meth Enzymol.* 68; Wu et al. (eds.) (1983) *Meth. Enzymol.* 100 and 101; Grossman and Moldave (eds.) *Meth. Enzymol.* 65; Miller (ed.) (1972) *Experiments in Molecular Genetics*, Cold Spring Harbor Laboratory, Cold Spring Harbor, New York; Old and Primrose (1981) *Principles of Gene*
0 *Manipulation*, University of California Press, Berkeley; Schleif and Wensink (1982) *Practical Methods in Molecular Biology*; Glover (ed.) (1985) *DNA Cloning* Vol. I and II, IRL Press, Oxford, UK; Hames and Higgins (eds.) (1985) *Nucleic Acid Hybridization*, IRL Press, Oxford, UK; and Setlow and Hollaender (1979) *Genetic Engineering: Principles and Methods*, Vols.
5 1-4, Plenum Press, New York. Abbreviations and nomenclature, where employed, are deemed standard in the field and commonly used in professional journals such as those cited herein.

All references cited in the present application are incorporated by reference herein to the extent that they are not inconsistent with the present disclosure.

10 The following examples are provided for illustrative purposes, and are not intended to limit the scope of the invention as claimed herein. Any variations in the exemplified articles which occur to the skilled artisan are intended to fall within the scope of the present invention.

15 EXAMPLES

Example 1: Production of the Synthetic Elastin

An elastin-mimetic synthetic protein ((-Val-Pro-Gly-Val-Gly-)₄(-Val-Pro-Gly-Lys-Gly-))₃₉ of molecular weight 81 kDa was synthesized by a recombinant genetic engineering method, the details of which have been reported elsewhere [McMillan et al. (1999) *Macromolecules* 32: 3643-3648; McMillan, R. A. and Conticello, R. P. (2000) *Macromolecules* 33: 4809-4821; McMillan et al. (1999) *Macromolecules* 32: 9067-9070]. A concatameric synthetic gene of 3000 base pairs encodes a repetitive polypeptide comprising 39 repeats of the elastin-mimetic sequence. The protein polymer was expressed from recombinant plasmid pRAM1 in *E. coli* strain BLR(DE3) under the regulatory control of a *lac* promoter with isopropyl β-
20 strain BLR(DE3) under the regulatory control of a *lac* promoter with isopropyl β-

5 thiogalactopyranoside induction. It was purified to a high yield (64 mg/L) by reversible, temperature-induced precipitation from the cell lysate. The sequence of the protein polymer has been confirmed by automated Edman degradation and MALDI-TOF mass spectroscopy of site-specific proteolytic cleavage fragments. Structural analysis of this recombinant protein has also included SDS PAGE, as well as ^1H and ^{13}C NMR [McMillan et al. (1999) *Macromolecules* 32: 3643-3648; McMillan, R. A. and Conticello, R. P. (2000) *Macromolecules* 33: 4809-4821].

Example 2: Other Materials

Low molecular weight silicone oils from Brookfield Engineering Laboratories, Inc.
5 were used as standards for measurements of solution viscosity.

Methacryloyl anhydride, eosin Y (EY, 5 wt% in water), triethanolamine (TEA) and 1-vinyl-2-pyrrolidinone (VP) were obtained from Aldrich (Milwaukee, WI) and were used as received. A UV sensitive radical photoinitiator 1-(4-(2-hydroxyethoxy)phenyl)-2-hydroxy-2-methyl-1-propan-1-one (Irgacure 2959) was kindly supplied by Ciba Speciality Chemicals
10 (Tarrytown, NY). Dialysis was conducted using Spectra/pro membrane (MWCO 6000-8000) obtained from VWR Scientific (West Chester, PA).

Poly(ethylene oxide) (PEO) with a nominal molecular weight of 900 kD was obtained
15 from Aldrich. Acid-soluble collagen was derived from tail tendons obtained from Sprague-Dawley rats weighing between 250 to 350 grams using a protocol similar to that described by Silver and Trelstad.¹⁹ Briefly, tendon fibers were extracted from rat tails using a wire stripper, immersed in 10 mM HCl (pH 2.0; 10 fibers per 100 mL), and stirred for 4 hours at room temperature. The soluble component was separated from the insoluble portion after centrifugation at 30,000g at 4 °C for 30 min and then sequentially filtered through 0.65 and
20 0.45 μm filters (Millipore Corp., Bedford, MA). NaCl was added to the filtrate so as to obtain a salt concentration of 0.7 M. The mixture was then allowed to stir for 1 hour and the precipitate collected after an one-hour centrifugation at 30,000 g and 4 °C. The pellet was allowed to dissolve overnight in 10 mM HCl (pH 2.0) and dialyzed against 20 mM phosphate buffer (disodium hydrogen phosphate at pH 7.4) for at least 8 hours at room temperature. A
25

5 second dialysis was then performed against a 20 mM phosphate buffer solution for at least 4 hours at 4 °C. The dialyzate was centrifuged at 30,000 g at 4 °C for 1 hour and the pellet was then dialyzed overnight against a solution of 10 mM HCl (pH 2.0) to obtain a collagen solution at a final concentration of 10 mg/mL. The solution was stored at 4 °C.

0 Lyophilized collagen was obtained by dialyzing the collagen solution overnight against distilled, deionized water (18 MΩ•cm, Continental), followed by lyophilization. Prior to use, lyophilized collagen was dissolved in 10 mM HCl at room temperature for 1 hour. The identity and purity of the collagen samples was confirmed by polyacrylamide gel electrophoresis.

5 Gelatin (Type A - Porcine Skin, 300 Bloom; product #G-2500) and 2,2,2-trifluoroethanol were purchased from Sigma Chemical Inc., St. Louis, MO. Methacryloyl anhydride (94%), Eosin-Y 5wt.% in water, 1-vinyl-2-pyrrolidinone (99+ %), and triethanolamine (98%) were purchased from Aldrich Chemical Inc., Milwaukee, WI.
10 Phosphate buffer used was an aqueous solution of sodium dihydrogen phosphate, monohydrate (J.T.Baker Inc., Phillipsburg, NJ) and disodium hydrogen phosphate (Fisher Scientific, Fair Lawn, NJ).

Example 3: Fiber Spinning

15 Elastin-mimetic peptide polymers were spun into fibers using an electrospinning technique, as detailed elsewhere. Briefly, peptide polymer solutions (10 - 15 wt%) were prepared in ultrafiltered grade, distilled, deionized water (18 MΩ•cm, Continental) by mixing for 12 hrs at 4°C. With the aid of a syringe pump (Harvard Apparatus, Inc., Holliston, MA), the solution was extruded at ambient temperature and pressure and at a defined flow rate
20 through a positively charged metal blunt tipped needle (22Gx1.5 inch). The needle was connected to a 1 mL syringe using Tygon™ (trademark of San Diego Plastics, Inc. National City, CA, plastic tubing) tubing (1.6mm i.d.). Fibers were collected on a grounded aluminum plate located below the tip of the needle. A high voltage, low current power supply (ES30P/DDPM, Gamma High Voltage Research, Inc., Ormand Beach, FL) was utilized to

5 establish the necessary electric potential gradient, which was varied between 0 and 30 kV as indicated. Either positive or negative polarity can be used to run the electrospinning process. V_{start} and V_{stop} , defined as the electric potential necessary to initiate or terminate jet formation, respectively were determined for different concentrations of elastin-mimetic polypeptide solutions.

0 Fabric samples were produced by electrospinning solutions for extended periods of time. The apparatus was modified to include a rotating mandrel to produce fabric samples. The fabric samples were collected on an aluminum foil wrapped around the grounded mandrel placed at a prescribed horizontal distance with respect to the charged tip of the needle.

5 Collagen-PEO solutions (1-2 wt %) were prepared in 10 mM HCl (pH 2.0) by mixing for 2 hours at ambient temperature. With the aid of a syringe pump (Harvard Apparatus, Inc.), the solution was extruded at ambient temperature and pressure and at a defined flow rate through a positively charged metal blunt tipped needle (22G x 1.5 inch). Fibers were collected
10 on a grounded aluminum plate located below the tip of the needle. A high voltage, low current power supply (ES30P/DDPM, Gamma High Voltage Research, Inc) was utilized to establish the electric potential gradient, which was varied between 0 and 30 kV, as indicated.

Example 4: Synthesis of Methacrylate-Modified Elastin and Fiber Spinning

15 The procedure for acrylate modification of amino-containing compounds developed by Van den Bulcke et al. was followed [Van Den Bulcke et al. (2000) *Biomacromolecules* 1: 31]. The elastin-mimetic polypentapeptide was dissolved in pH 7.5 phosphate buffer solution. The solution was cooled to 5 °C and an excess of methacryloyl anhydride was added. The reaction was allowed to proceed for 8 hours. The reaction mixture was diluted and was dialyzed
20 against distilled water at room temperature for 48 hours with frequent changes in the dialyzate solution. The dialyzate was subsequently freeze-dried and stored at room temperature. The degree of functionalization (DOF) was defined as the ratio of amino moieties functionalized

5 to the total number of amino moieties in elastin prior to functionalization. DOF could be varied by changing the methacryloyl anhydride to elastin ratio.

Electrospinning was used to spin fibers of AME from aqueous solutions. Solution concentration, flow rate and operating voltage were found to be the critical parameters affecting the spinning process. The details of the technique and optimization of process parameters to yield smooth nanofibers have been discussed in detail in an earlier report. [Huang et al. (2000) *Macromolecules* 33, 2989]. A solution of 10-15 wt% AME(65) polymer in ddH₂O was prepared with the addition of 5 wt% (of the protein polymer content) of triethanolamine, as free radical crosslinker. For example, to each 100 mgs of protein polymer, 5 mgs of triethanolamine or approximately 50 μ L of the stock EY/TEA/VP solution was added. A field strength of 18 kV was chosen for fiber formation and the distance between the syringe tip and the collecting plate was fixed at 15 cm. The flow rate was 50 μ L/min. A stock solution of EY photoinitiator was prepared as 10 mM EY, 225 mM TEA, and 37 mM VP in water. Irgacure 2959 was directly added to the prepared protein solution.

For the purpose of crosslinking studies four samples of 15 wt% AME(65) solution in ddH₂O were prepared. Eosin Y was added to the first solution (amount of photoinitiator corresponded to 3 wt% of the protein in solution) and IRGACURE 2959[®] was added to the second (amount of photoinitiator corresponded to 6 wt% of the protein in solution). In order to ensure uniform dispersion of the photoinitiator, both solutions were stirred in the dark for 12 hours. Additional samples that did not contain photoinitiator were irradiated and used for comparative analysis. All samples were dried under vacuum for 24 hours. Subsequent to drying, the Eosin Y and Irgacure containing samples were irradiated under visible light for 45 minutes and UV light (365 nm) for 30 minutes, respectively.

Example 5: Preparation of non-woven acrylated gelatin fabrics:

To prepare acrylate modified gelatin, a 5-weight % solution of gelatin was made in 10mM phosphate buffer solution, pH 7.5. To this solution a four times excess of

5 methacryloyl anhydride (in relation to target amino acid residues) was added to the solution. The reaction was then stirred at 40°C for 4 hours. The solution was then dialyzed using a Spectra/Por membrane (MWCO: 6-8,000) against 60 volumes of ddH₂O at 40°C for 48hrs with constant changes in the dialyzing solution. The solution was then lyophilized and the dialyzate was stored at -30°C.

0 5% weight solutions (150mg of acrylated gelatin in 1278 μ L ddH₂O/ 222 μ L photo initiator solution) were prepared and plated into 29.14 cm² polystyrene dishes. Solutions were made using the standard, medium and high photoinitiator preparations. The solvent was allowed to evaporate at room temperature (24°C, 43% relative humidity). After drying, the
5 samples were exposed to a visible light source (Dyna-Lume "dyna-light" #240-380, 70mW/cm²) for various periods from 30 minutes to 31/2 hours for crosslinking. The films were then prepared for mechanical testing as outlined earlier.

The gelatin electrospinning apparatus consisted of a syringe pump (Harvard Apparatus),
10 a syringe, an 18 gauge blunt end needle (Popper and Sons, Inc.), a grounded rotating metallic 14mm O.D. mandrel (for production of tubes), a grounded 10cm by 10 cm aluminum covered plate (for flat fabric production), an electric mandrel rotor, a Dyna-Lume "dyna-light" #240-380, and a high voltage source (Gamma High Voltage, HV power supply, c.f., Figure 1(a)). Solutions of gelatin and acrylated gelatin (150 mgs) were prepared in concentrations from
15 10wt% to 25wt% in ddH₂O along with 222 μ L of the high concentration photo initiator solution. The syringe containing the acrylated gelatin/photo initiator solution was shielded during spinning with an opaque tape to prevent premature crosslinking. The needle was heated using a heating lamp to avoid gelation in the needle and to maintain uniform flow rate. The temperature profile across the syringe and the needle was obtained with a type K
20 thermocouple. Temperature readings were obtained across four points (labeled T₁ through T₄ in the figure) in the syringe. The profiles were measured after steady state had been achieved. By varying the setting on the heat lamp, the temperature in the needle could be adjusted to desired levels. The temperature was maintained between 45 and 55 °C. The applied field of 18kV and deposition distance of 10 cm were kept constant for all runs. A flow rate of 30

5 $\mu\text{L}/\text{min}$ was maintained during electrospinning, because flow rates in excess of 30 $\mu\text{L}/\text{min}$ produced droplets. The fibers on deposition were exposed to light throughout the spinning process and for an additional two hours after fiber spinning had ceased. To function as a release agent a layer of polyethylene oxide (MW \sim 900 kDa) was deposited on the aluminum foil to achieve a 100 μm thick covering. The acrylated gelatin fibers were then deposited on
0 top of the PEO layer. Deposition time varied depending on the volume of material to be spun.

Example 6: Image capture of non-woven fabric samples and analysis of fiber diameter and orientation distribution

Fabrics were generated by electrospinning at a 150 $\mu\text{l}/\text{min}$ from a 15 wt% solution of
5 elastin-mimetic peptide polymer. Specimens were placed directly on a mirror and imaged using a directional lighting arrangement where light is collimated using an "on-axis" system comprised of both a diffuser and a beam-splitter. Light passes through the sample and is reflected vertically off the mirror surface back to a CCD camera. Specular reflections from fiber surfaces do not reach the camera. Thus, fibers, regardless of their position within the
0 fabric, merely block the light, appear dark, and are in focus. Captured images underwent segmentation or "thresholding" in order to isolate individual fibers from background. In this process, local contrast enhancement procedures were utilized including relaxation and edge thresholding techniques. Analysis also required skeletonizing of the image in which the backbone of individual fibers, corresponding to an image one pixel wide, was determined.
5 Skeletonizing requires generating a "distance map" of the image that represents the minimum distance from each pixel belonging to an object to the background. Therefore, the highest value in the distance transform image correlates with the object center, and the peak line coincides with the axis or skeleton of the object. By using the skeleton as a guide for tracking the distance transformed image, the intensities (distances) from the fiber center to background
0 can be determined in order to compute the diameter at all points along the skeleton. Similarly, fiber orientation is characterized by utilizing a chord-tracking algorithm, which tracks fixed small segments of individual fibers. Details of these automated image analysis techniques, as applied to fiber networks in the form of non-woven fabrics, are provided elsewhere
[Pourdeyhimi et al (1999) *Textile Res. J.* 69: 233-236; Pourdeyhimi et al (2001) *Textile Res.*

J. 71: 157-164]. Analysis of fiber diameter and orientation distribution was based upon a minimum of 10 image fields obtained from at least two separate samples.

Example 7: Stress-strain properties of non-woven fabrics

Uniaxial tensile tests were performed elastin-mimetic materials on a Textechno Favimat (Herbert Stein GmbH & Co. KG, Germany). Dry samples were tested at an extension rate of 5 mm/min and an initial gauge length of 10 mm. The maximum range of the load cell is 210 cN. A total of eight samples were analyzed.

Uniaxial tensile testing of collagen/PEO material was performed on a Minimat 2000 (Miniature Materials Tester, Rheometric Scientific, Inc., Piscataway, NJ). Dry collagen-PEO fabric samples were tested at an extension rate of 2 mm/min and at an initial gage length of 8mm. The maximum range of the load cell is 20 N. A total of six samples were analyzed. Samples thickness was determined by use of a profilometer (Tencor Alphastep 500) at different points along the sample and an average sample thickness of 0.05 mm was obtained. The samples were cut at a width of 5mm.

A miniature materials tester Minimat 2000 (Rheometric Scientific, Piscataway, NJ) was used to determine the tensile properties of the unmodified and the modified elastin fabrics. The machine was used in the tensile deformation mode with a 20N load cell and a strain rate of 1 mm/min. Fabric samples (10mm \times 1.5 mm \times 0.05 mm) were used as test specimens with a gauge length of 8mm. For each sample, eight specimens were tested and average modulus and tensile strength values were determined.

Example 8: Instrumentation

All ^1H NMR spectra were recorded at room temperature on a Bruker AMX 500 spectrometer operating at a ^1H resonance frequency of 500 MHz. Thirty-two scans were acquired for signal-to-noise averaging. A recycle delay of 30 seconds was used to ensure

5 quantitative spectra. In all cases D₂O was used as the internal standard and a concentration of 10 mg/ml was employed.

0 All solid-state NMR experiments were conducted at room temperature on a Bruker DSX 300 spectrometer operating at a ¹H resonance frequency of 300 MHz in a Bruker double resonance MAS probehead. Standard cross polarization (CP) pulse sequence was employed under conditions of magic angle spinning (MAS). A spinning speed of 5 kHz was employed. A TOSS sequence was used in conjunction with CP to provide a spectrum free of spinning sidebands [Dixon, W. T. (1982) *J. Chem. Phys.* 77, 1800; Dixon et al. (1982) *J. Magn. Reson.* 49, 341]. A 4.5-μs ¹H 90° pulse, a 1-ms contact time, a 9-μs ¹³C 180° pulse and a 3-
5 sec recycle delay were employed with 5000 – 16000 scans accumulated for signal averaging.

In studies of collagen fibers, all ¹H NMR spectra were recorded at room temperature on a Bruker AMX 500 spectrometer operating at a ¹H resonance frequency of 500 MHz. Thirty-two scans were acquired for signal-to-noise averaging and a recycle delay of 30 seconds
0 was used to ensure quantitative spectra. In all cases D₂O was used as the internal standard and a concentration of 10 mg/mL was employed.

All solid-state NMR experiments were conducted at room temperature on a Bruker DSX 300 spectrometer operating at a ¹H resonance frequency of 300 MHz in a Bruker double
5 resonance MAS probehead. Standard cross polarization (CP) pulse sequence was employed under conditions of magic angle spinning (MAS). A spinning speed of 5 kHz was employed. A TOSS sequence was used in conjunction with CP to provide a spectrum free of spinning sidebands.²⁰ A 4.5-μs ¹H 90° pulse, a 1-ms contact time, a 9-μs ¹³C 180° pulse, and a 3-sec
recycle delay were employed with accumulation of 5000 to 16000 scans for signal averaging.
0 Direct polarization (DP) experiments were conducted with a recycle delay of 1 s, a ¹³C 90° pulse length of 4.5 μs, and a MAS rate of 5 kHz. For DP experiments, 1024 scans were acquired.

5 ^1H dipolar magnetization transfer experiments were conducted under static conditions (without magic-angle sample spinning). Recycle delays of 5 s, ^1H 90° pulse lengths of $4.5\ \mu\text{s}$, and ^1H 180° pulse lengths of $9\ \mu\text{s}$ were used. The timing diagram for the spin diffusion pulse sequence has been reported in detail elsewhere.²¹ A dipolar filter selection sequence consisting of twelve 90° pulses separated by $10\text{-}\mu\text{s}$ delays was employed for 20 consecutive loops to
0 establish the initial magnetization gradient. Thirty-two scans were accumulated for signal averaging and the spin diffusion time (t_{SD}) was incremented from $1\ \mu\text{s}$ to 800 ms. Correction for spin-lattice relaxation during the spin diffusion time was achieved by repeating the experiment with the selection filter removed (# dipolar filter cycles, $n = 0$). The data acquired with and without the selection cycles were normalized with respect to the first time point and
5 the spectral intensity corresponding to the mobile domain. The ratio of I_{PEO} (with selection) to I_{PEO} (without selection) provided the spin diffusion data as a function of t_{SD} .

In order to examine the chemical structure of the component selected using the dipolar filter, a CP sequence was appended to the dipolar filter sequence. For this experiment, a 3-sec
10 recycle delay, a $4.5\text{-}\mu\text{s}$ ^1H 90° pulse, and a 1-ms contact time were used. The experiment was conducted under conditions of MAS with a spinning speed of 5 kHz and 10,000 scans were acquired for signal averaging.

Temperature-dependent turbidimetry measurements were recorded in an Ultrospec 3000
15 UV/visible spectrophotometer equipped with a programmable Peltier Cell and temperature control unit from Amersham Pharmacia Biotech, Inc. (Piscataway, NJ). Inverse temperature transitions of elastin-mimetic polypentapeptide and its acrylate modified analogs were monitored in $d\text{dH}_2\text{O}$ solution (concentration of $0.5 - 0.7\ \text{mg/ml}$) at 280 nm.

20 An in-lens field emission scanning electron microscope (ISI DS-130F Schottky Field Emission SEM, York Electron Optics Ltd., York, UK) was used and operated at 5 or 25 kV. High-definition topographic images at low ($\sim 1,000\times$) and medium ($30,000\times$) magnifications and high resolution, and high magnification images ($\geq 100,000\times$) were digitally recorded with very short dwell times and without beam induced damage. Fiber samples were deposited onto
25 silicon chips for SEM studies. The silicon chips were subsequently mounted onto aluminum

5 specimen stubs with silver paste, degassed for 30 minutes, and coated with a 1 nm chromium (Cr) ultrathin film using a Denton DV-602 Turbo Magnetron Sputter System.

For transmission electron microscopy (TEM) imaging a JEOL 1210 TEM was operated at 70 kV voltage. Fiber samples were deposited onto silicon chips and carbon coated grids for scanning and transmission EM studies, respectively. Samples containing silicon chips were subsequently mounted onto aluminum specimen stubs with silver paste, degassed for 30 minutes, and coated with a 1 nm chromium (Cr) ultrathin film using a Denton DV-602 Turbo Magnetron Sputter System.

5 Visible light irradiation was performed using a DynaLume quartz halogen illuminator equipped with a heat shield obtained from Scientific Instruments. Ultraviolet irradiation was performed with an UVP 8-watt handheld model (model UVL-18) operating at 365 nm.

10 Bulk viscosity was determined using silicone oil viscosity standards (Brookfield Engineering Laboratories, Inc.) and solution conductivity determined using a conductivity flow cell (BIORAD, Hercules, CA).

Table I. The viscosity for the 2wt% Lyophilized Collagen of different PEO ratio and fixed 34 mM NaCl

Collagen Concentration mg/ml	PEO Concentration Mg/ml	Collagen / PEO weight ratio	Viscosity (cp)
20	0	0	217
20	0.67	30 : 1	289
20	2	10 : 1	475
20	4	5 : 1	592
20	10	2 : 1	1150
20	20	1 : 1	5536
20	40	1 : 2	36198

Table II. Conductivity of the 2wt% Lyophilized Collagen Dissolved in the HCl solution (pH=2.0)

[NaCl] mM	1	2	3	Average Conductivity
0	1.45	1.42	1.44	1.44
15	1.54	1.56	1.55	1.55
25	2.06	2.05	2.06	2.06
34	2.27	2.26	2.25	2.26

Table III. The ultimate tensile strength and modulus of pure PE , collagen/PEO of 1 : 1 and 1 : 2 weight ratio nonwoven fabric samples

Fabric Samples	Tensile Strength (Mpa)	Modulus (Gpa)
Pure PEO	0.09	0.007
1 : 1 Collagen/PEO	0.37	0.012
1 : 2 Collagen/PEO	0.27	0.008

WHAT IS CLAIMED IS:

1. A fiber, fiber network or nonwoven fabric comprising at least one cross linked protein selected from the group consisting of elastin, an elastin mimetic protein, gelatin and collagen.
2. The fiber, fiber network or nonwoven fabric of claim 1 further comprising a synthetic polymer.
3. The fiber, fiber network or nonwoven fabric of claim 2 wherein the synthetic polymer is water soluble polymer.
4. The fiber, fiber network or nonwoven fabric of claim 3 wherein the water soluble polymer is poly(ethylene oxide).
5. The fiber, fiber network or nonwoven fabric of claim of claims 1 to 4 wherein the cross linked protein is formed from a functionalized protein, wherein a functional group is selected from the group consisting of acrylamide moiety, a methacrylamide moiety and a vinyl group.
6. The fiber, fiber network or nonwoven fabric of claim 5 wherein the functional moiety is a vinyl group or a methacrylamide and wherein cross linking is mediated by a photoinitiator and photoirradiation.
7. The fibers, fiber network or nonwoven fabric of claim 4 or 5 wherein the crosslinking is mediated by glutaraldehyde.
8. The fiber network or nonwoven fabric of claim 5 wherein the fibers are present as alternating layers of cross linked collagen and cross linked gelatin.

9. The fiber network or nonwoven of claim 5 wherein the fibers are present as alternating layers of cross linked collagen and cross linked elastin or cross linked elastin mimetic protein.
10. The fiber network or nonwoven fabric of claim 10 wherein the proteins are cross linked after layering of the cross linked collagen and cross linked gelatin.
11. The fiber network or nonwoven fabric of claim 10 further comprising living cells.
12. The fiber network or nonwoven fabric of claim 11 wherein the living cells are selected from the group consisting of endothelial cells, smooth muscle cells, fibroblasts, stem cells, chondrocytes, osteoblasts or a human or animal cell which has been transformed or transfected to produce a protein of interest.
13. The fiber, fiber network or nonwoven fabric of claim 3 wherein the fiber formed of cross linked collagen and poly(ethylene) oxide.
14. The fiber, fiber network or nonwoven fabric of claim 13 further comprising at least one therapeutic compound.
15. The fiber, fiber network or nonwoven fabric of claim 14 wherein the at least one therapeutic compound promotes wound healing.
16. The fiber, fiber network or nonwoven fabric of any of claims 4 to 15 wherein said fiber network or nonwoven fabric is fabricated as a planar sheet or as a tubular conduit.
17. The use of the fiber, fiber network or nonwoven fabric of any of claims 2 to 16 in the fabrication of a medical implant or wound dressing having improved biocompatibility over non biomaterial implants.

18. The use according to claim 17 wherein the medical implant is a graft for skin, vein, artery, ureter, bladder, esophagus, intestine, stomach, heart valve, heart muscle or tendon.
19. The use of claim 17 wherein implant is used to reinforce closure of a surgical incision.
20. The use according to claim 17 wherein the surgical incision is associated with a lung biopsy or an intestinal anastomosis.

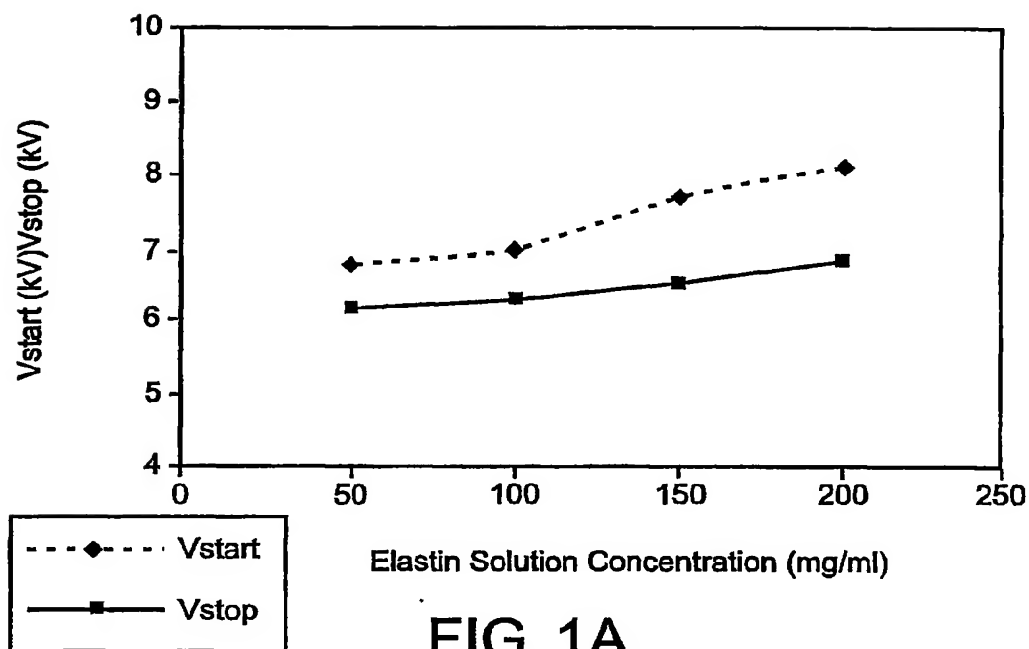


FIG. 1A

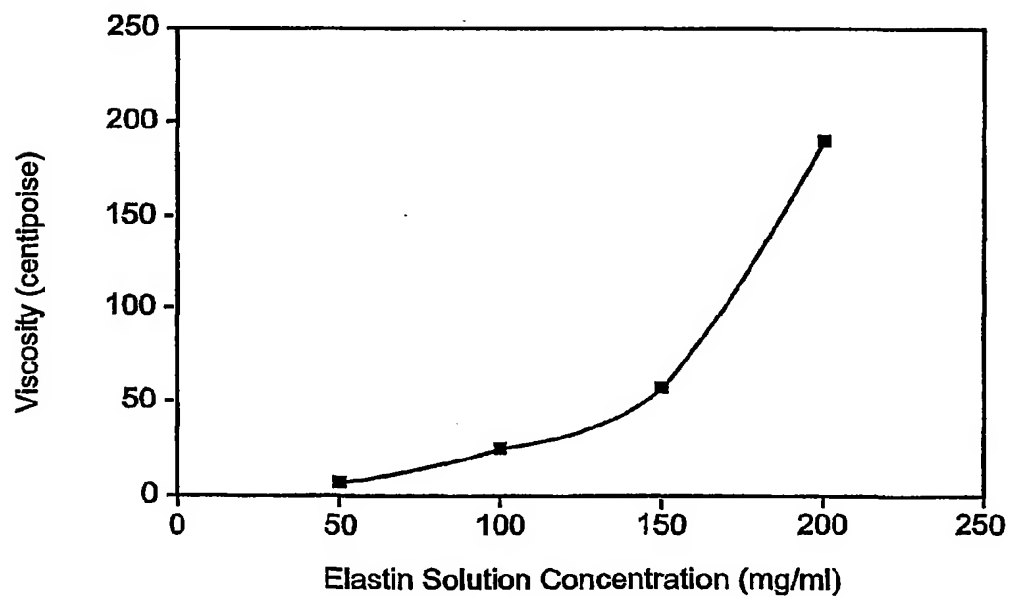


FIG. 1B

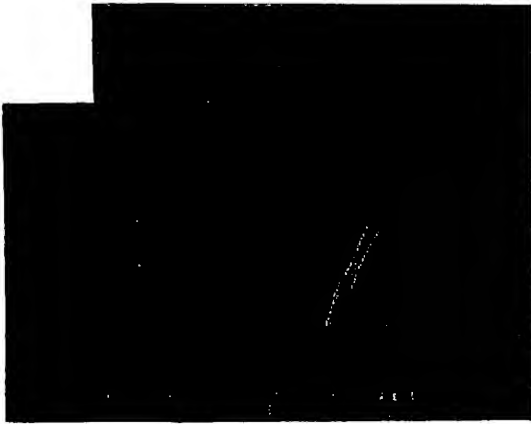


FIG. 2A

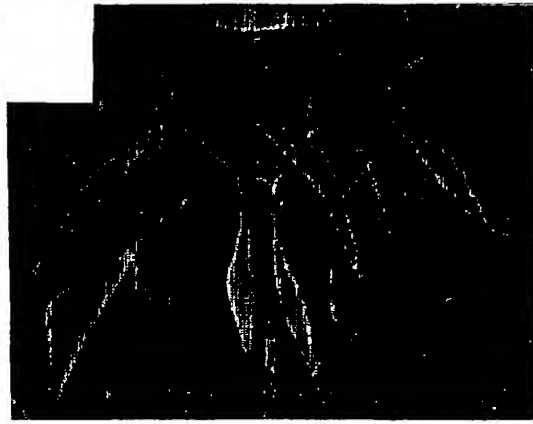


FIG. 2B

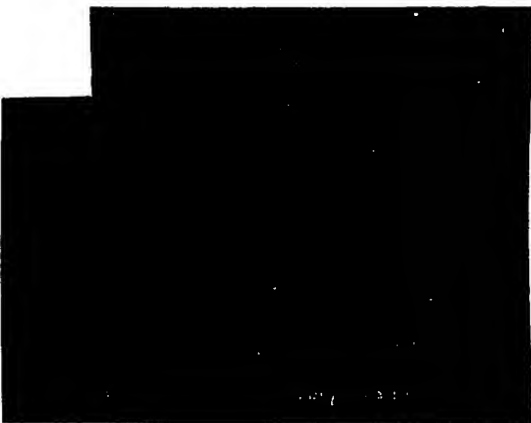


FIG. 2C

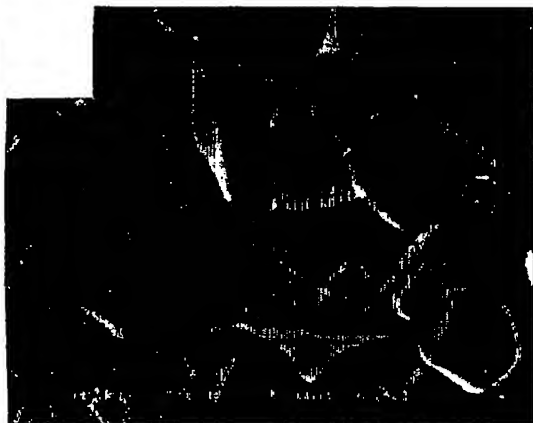


FIG. 2D

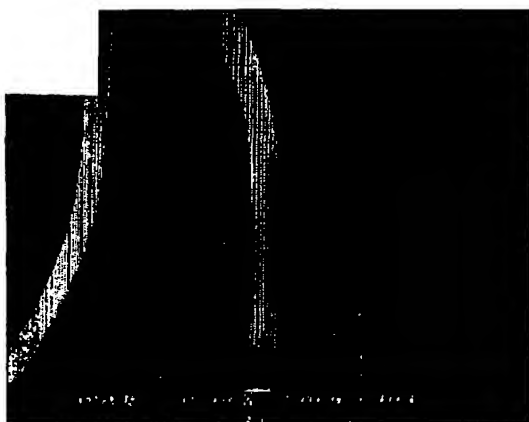


FIG. 3A



FIG. 3B



FIG. 3C

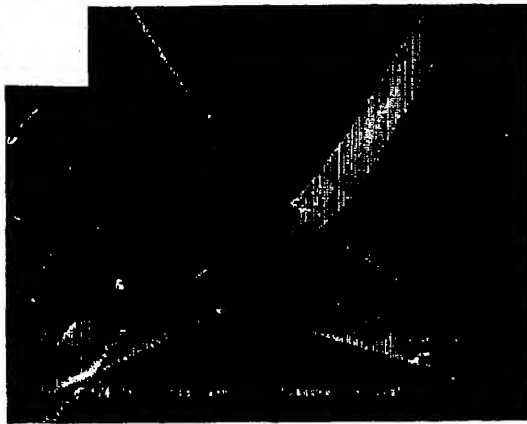


FIG. 3D

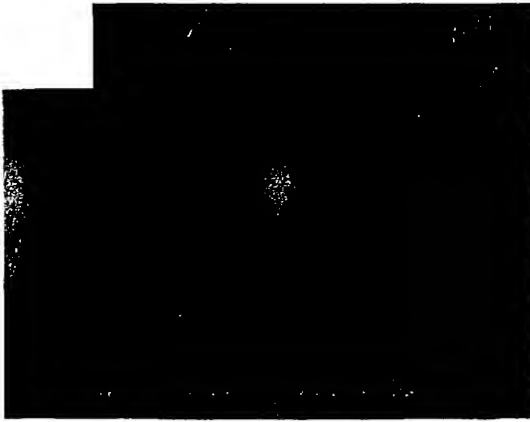


FIG. 4A

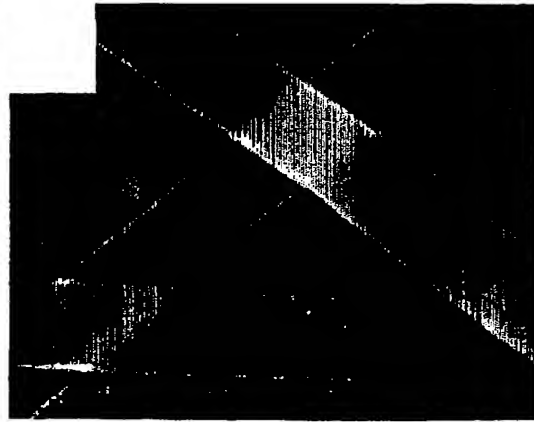


FIG. 4B

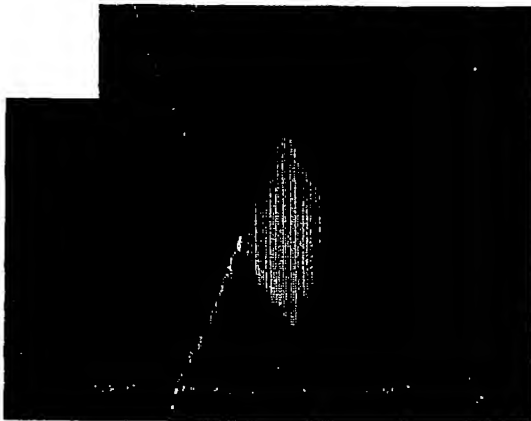


FIG. 4C



FIG. 4D

FIG. 5A

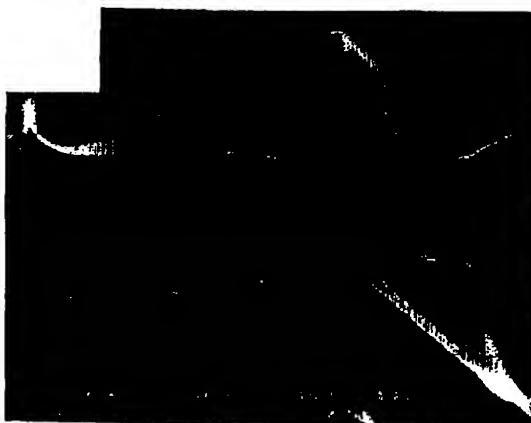


FIG. 5B

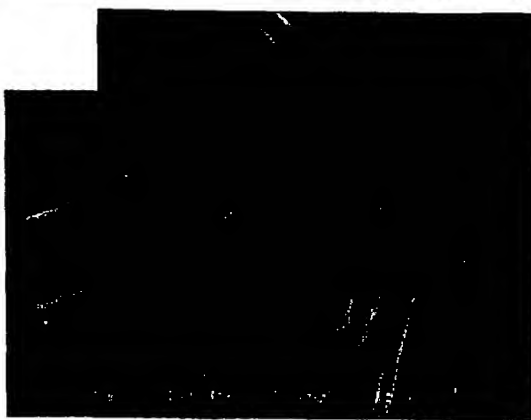
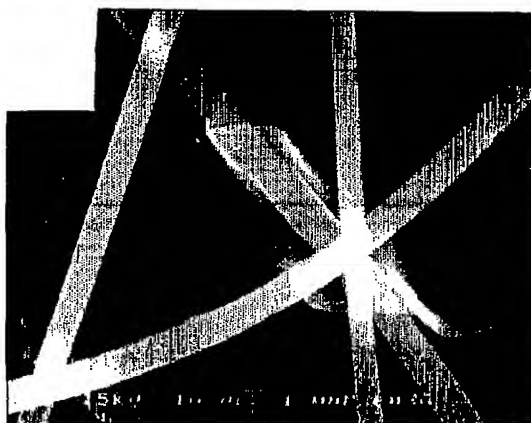


FIG. 5C



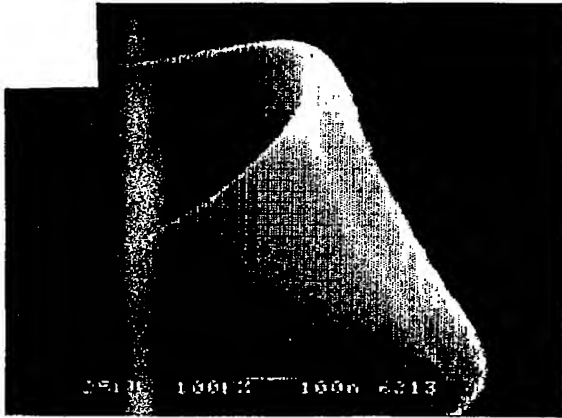


FIG. 6A

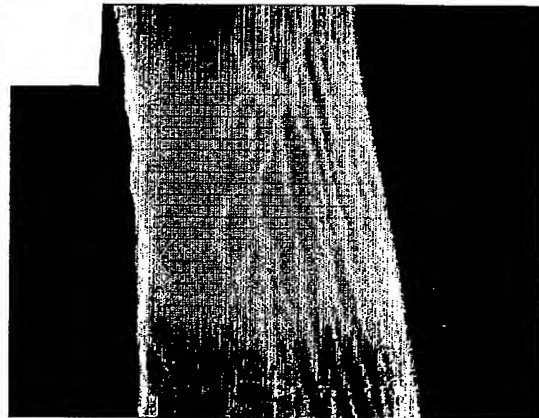


FIG. 6B

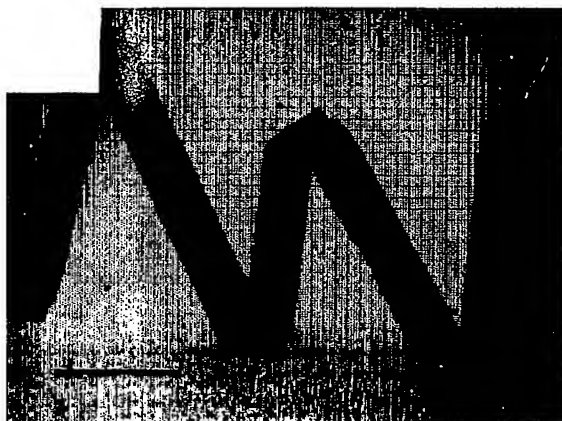


FIG. 6C

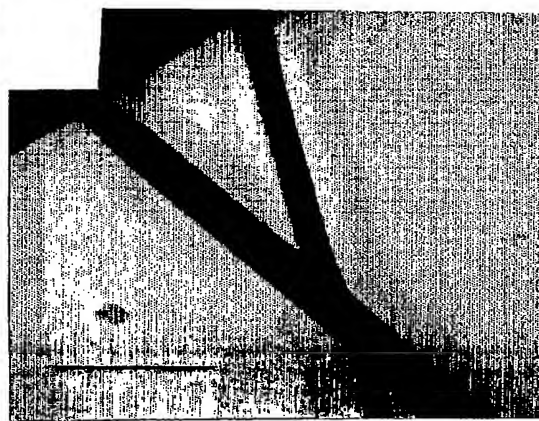


FIG. 6D

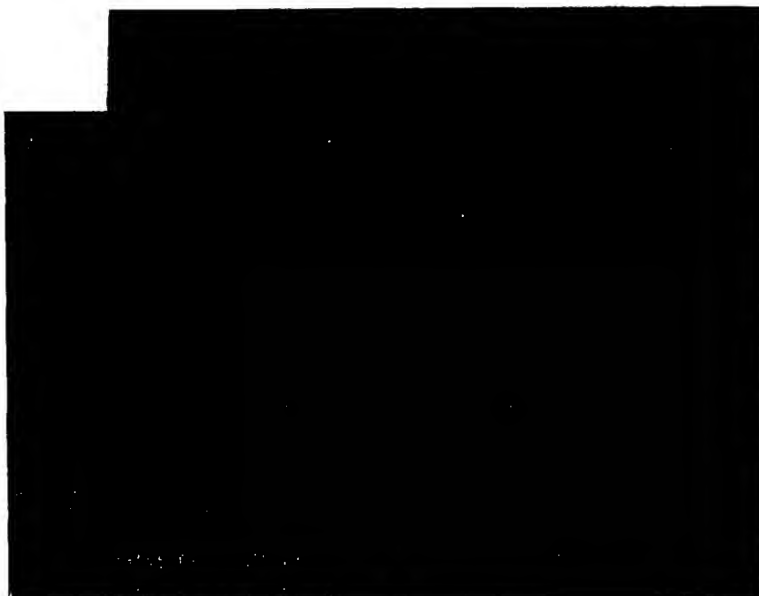
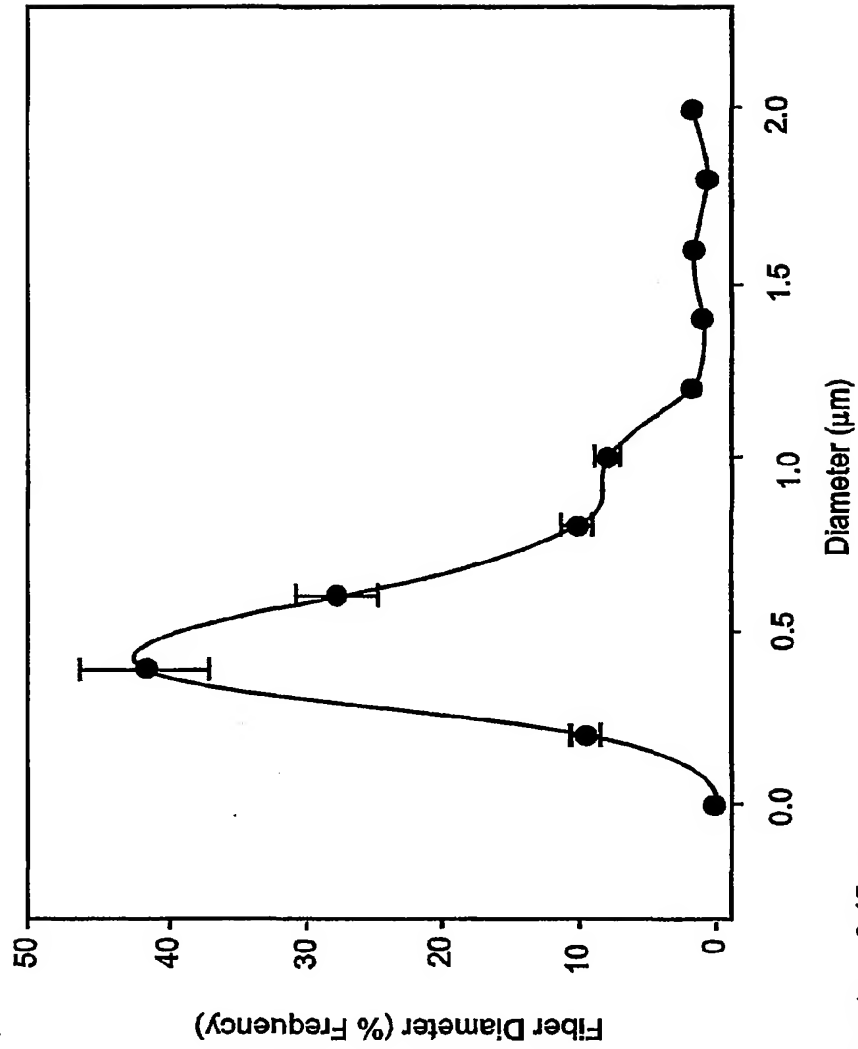


FIG. 7A

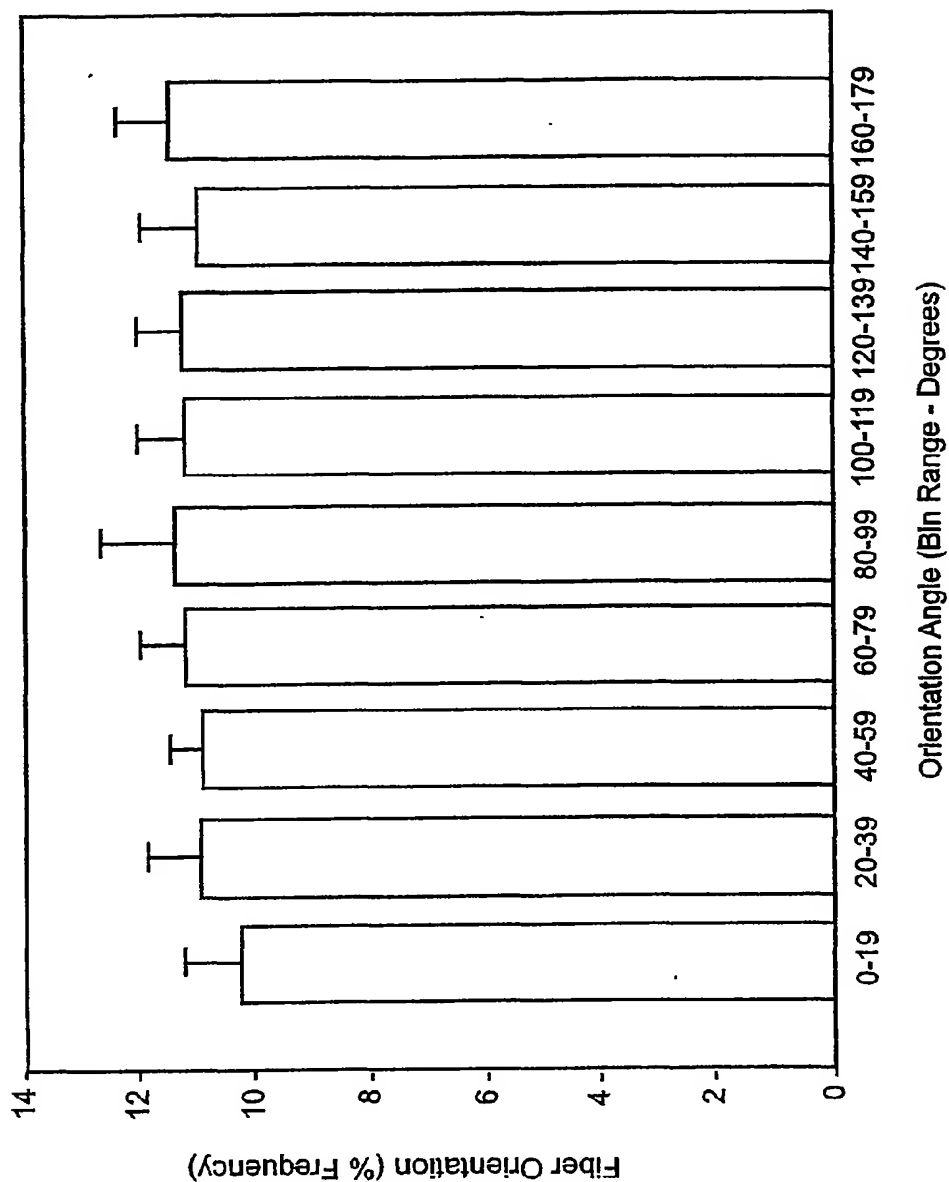


FIG. 7B



Mean Diameter = 0.45 μm
 Standard Deviation = 0.28
 Maximum Diameter = 1.92 μm
 Minimum Diameter = 0.1137 μm

FIG. 8



Mean Orientation = 90.74 ± 1.32
 Standard Deviation = 52.72 ± 0.36
 Anisotropy Ratio = 1.04 ± 0.099

FIG. 9

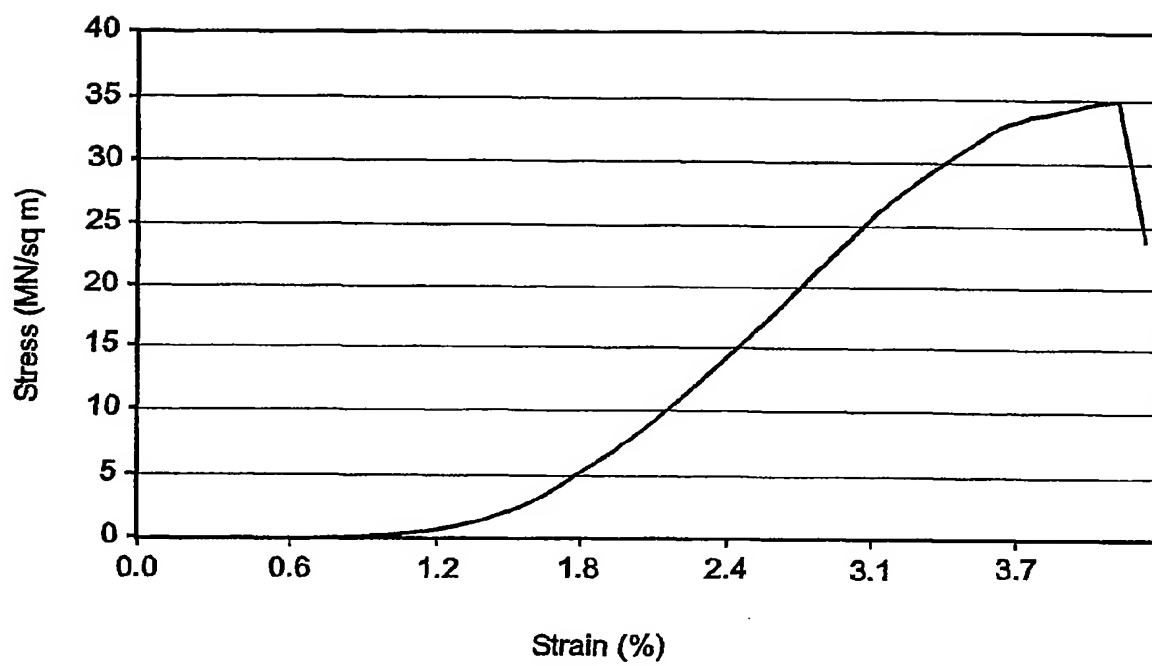


FIG. 10

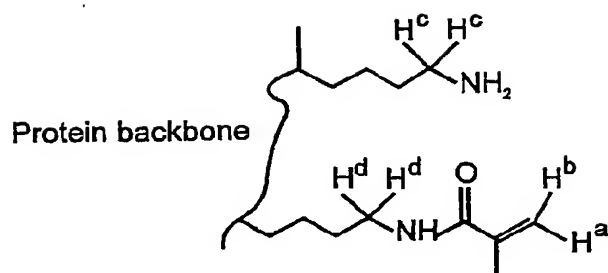


FIG. 11A

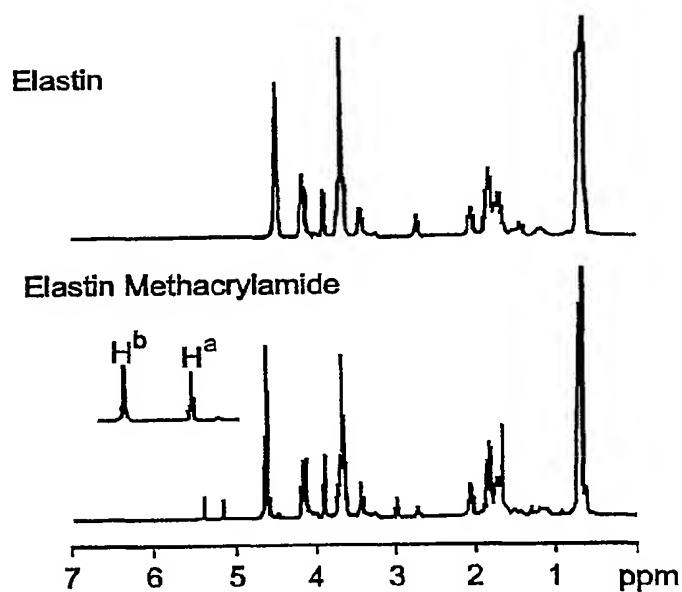


FIG. 11B

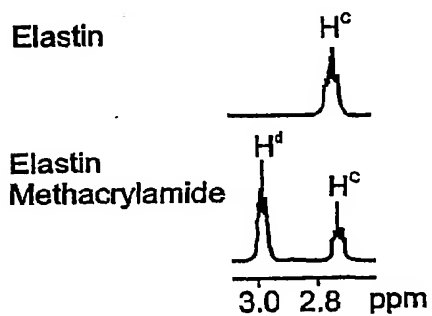


FIG. 11C

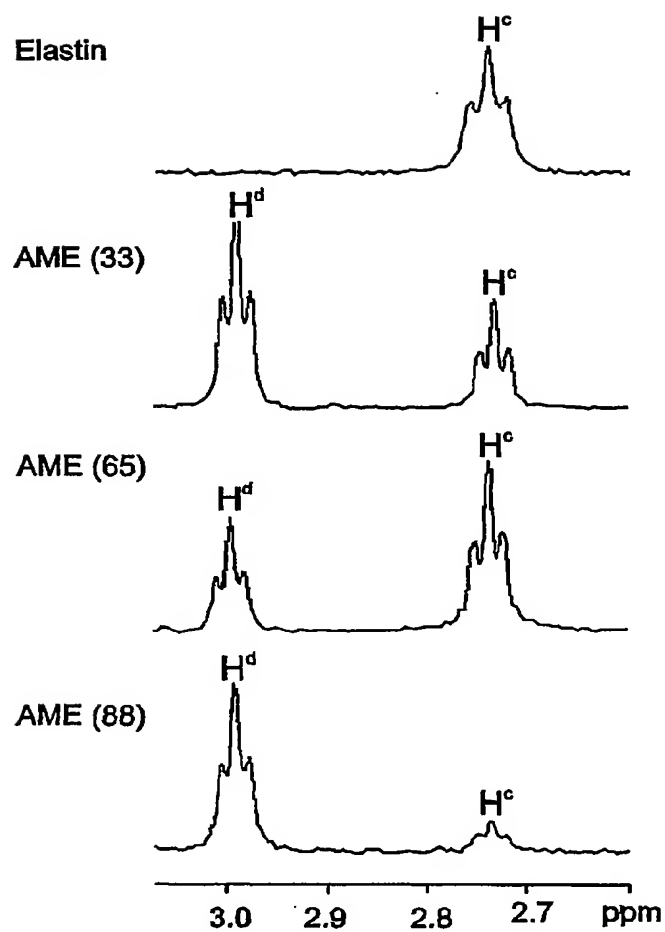


FIG. 12


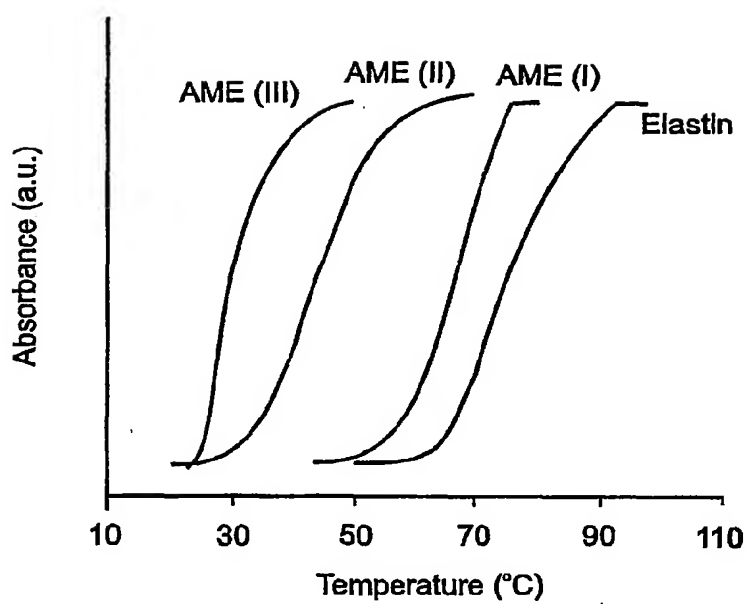



FIG. 13



2000X
FIG. 14A

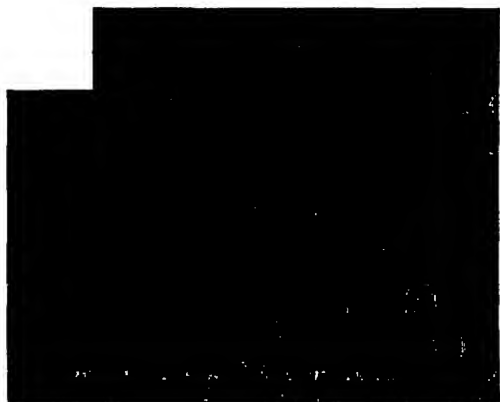

4000X
FIG. 14B

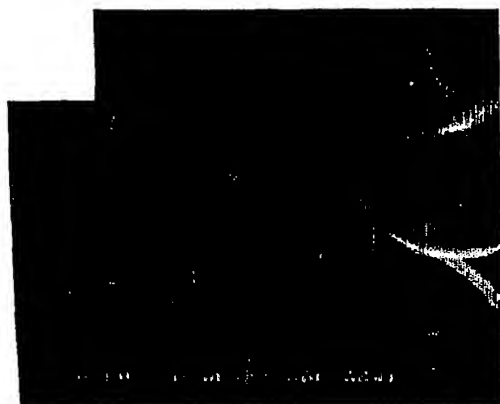

10000X
FIG. 14C




20000X
FIG. 14D




1000X
FIG. 15A



5000X
FIG. 15B

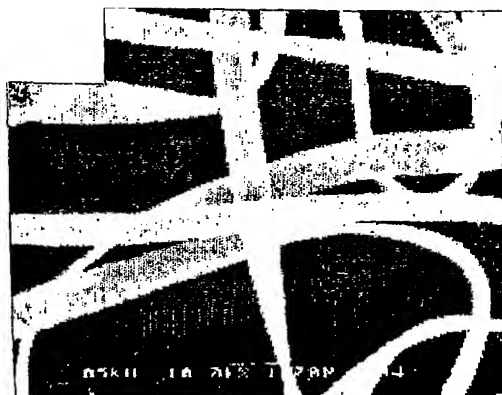

10000X
FIG. 15C

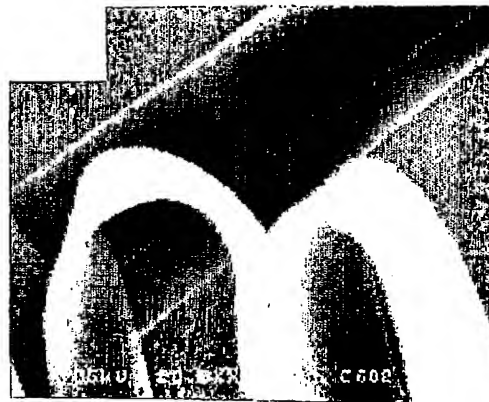

20000X
FIG. 15D

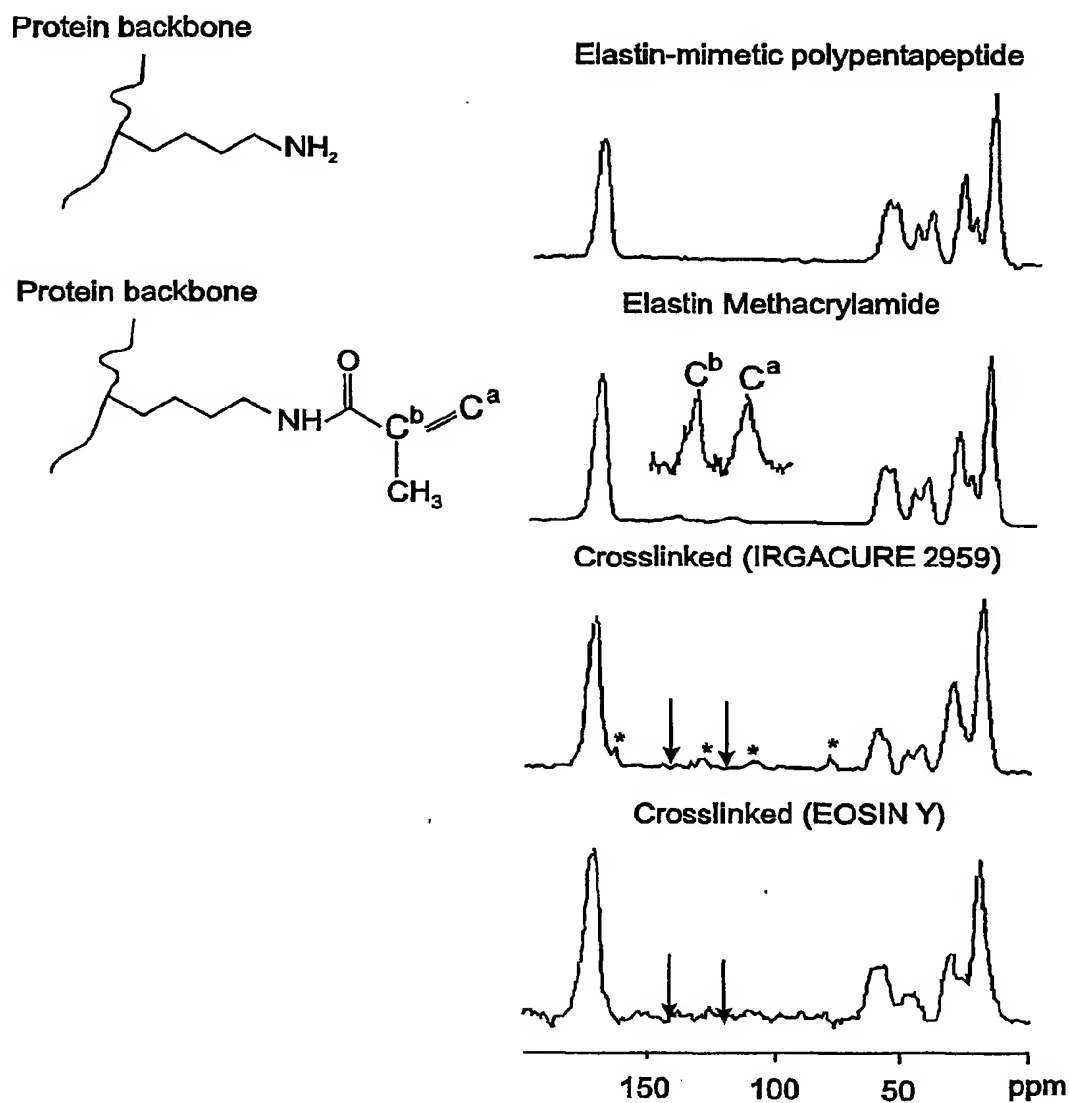


FIG. 16

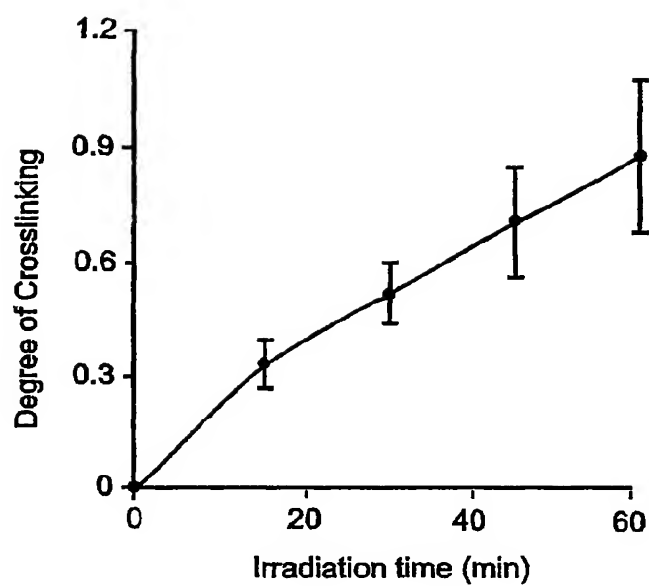


FIG. 17

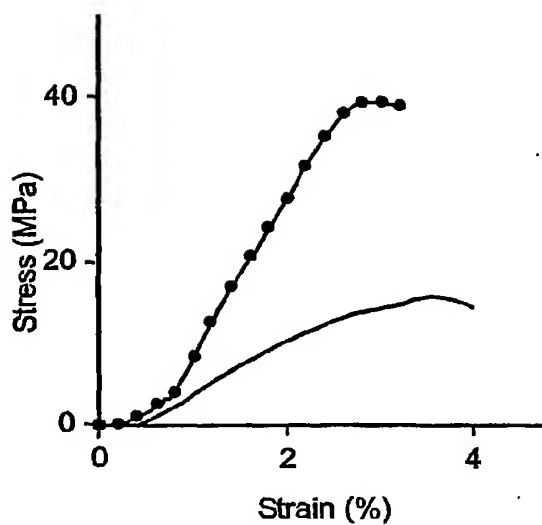


FIG. 18A

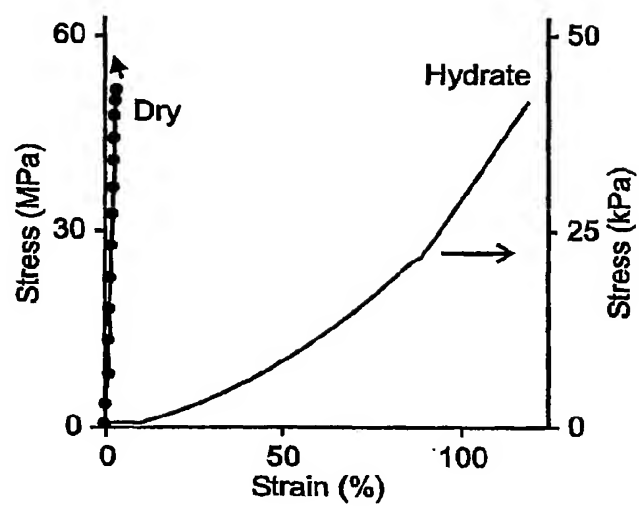


FIG. 18B

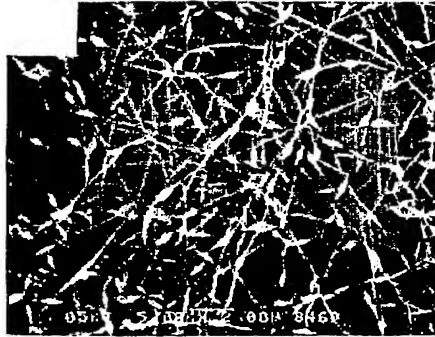


FIG. 19A

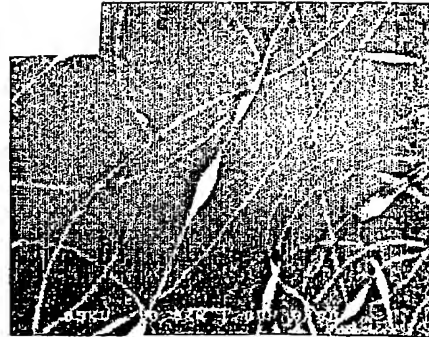


FIG. 19B

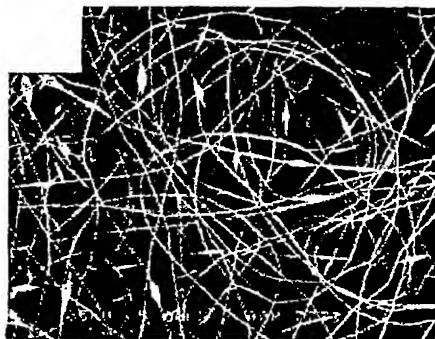


FIG. 19C

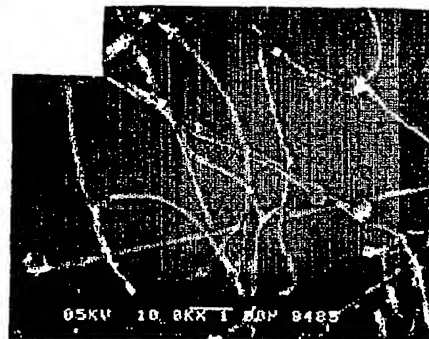


FIG. 19D

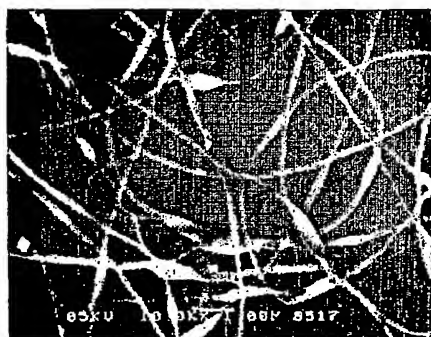


FIG. 20A

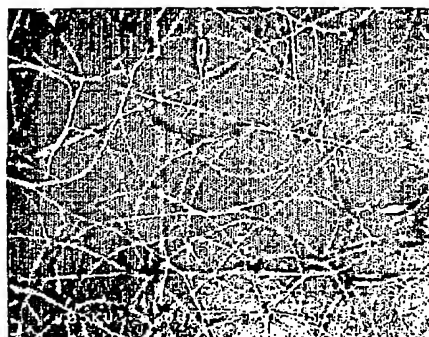


FIG. 20B

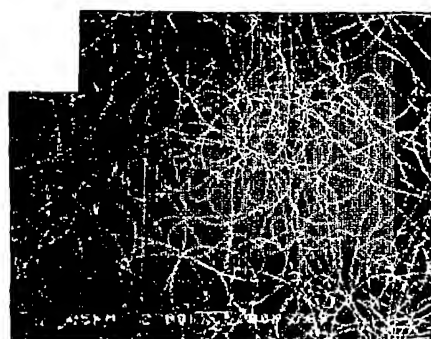


FIG. 20C

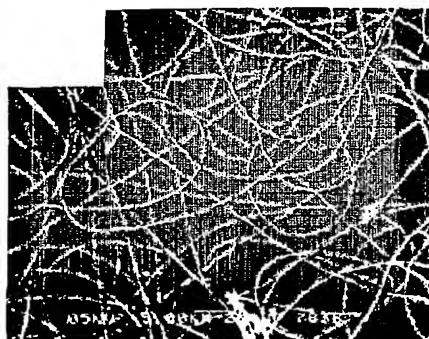


FIG. 20D

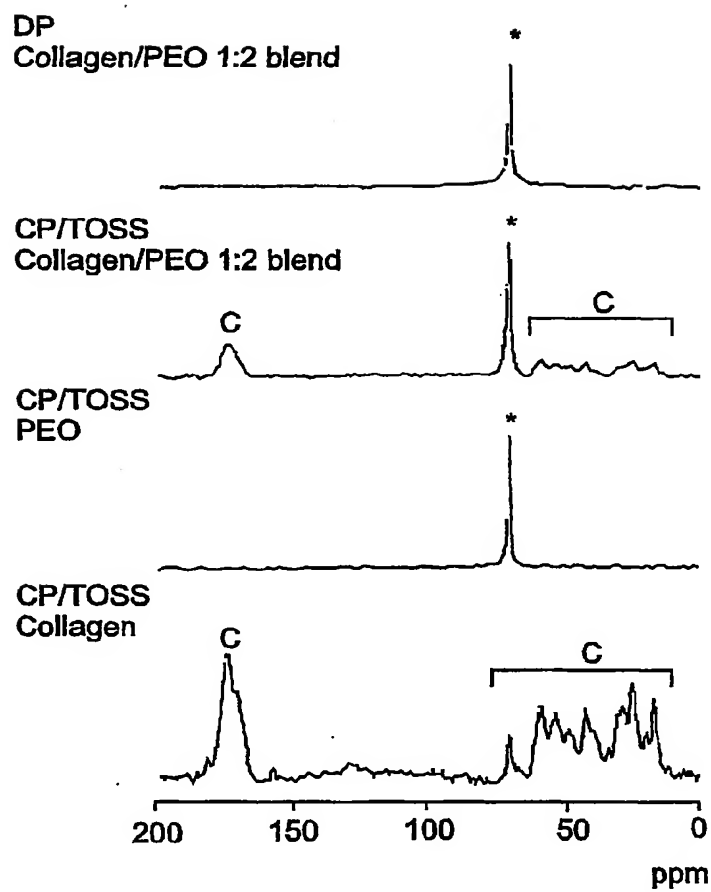


FIG. 21

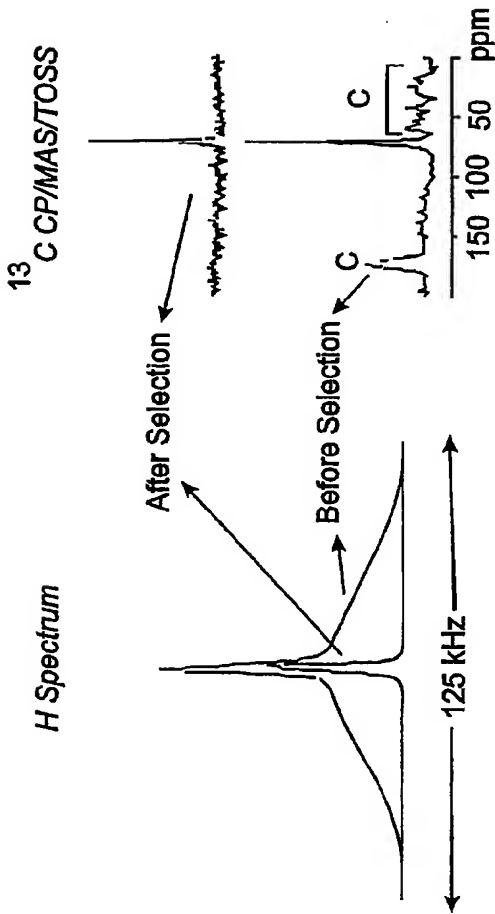


FIG. 22A

FIG. 22B

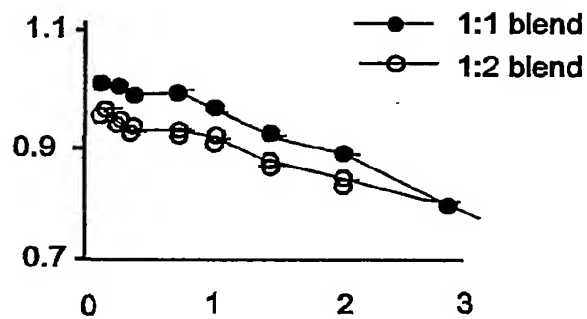


FIG. 23A

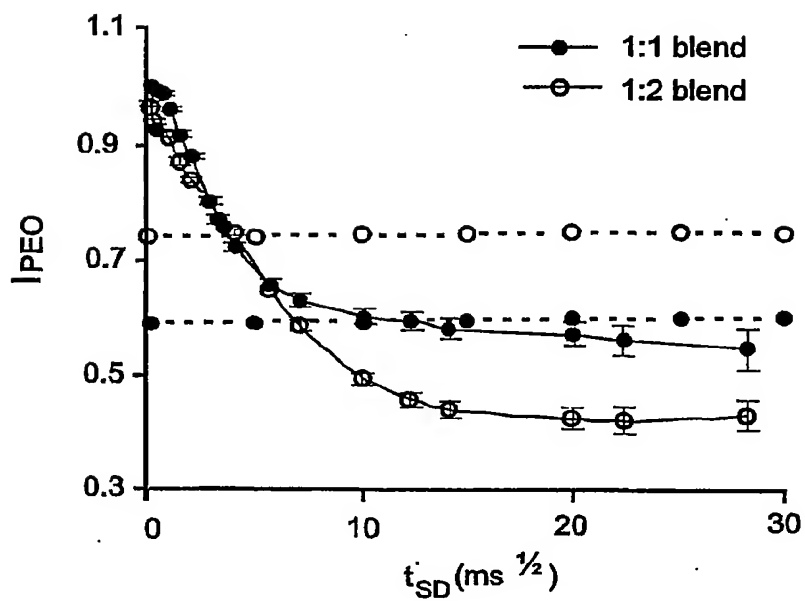


FIG. 23B

Gelatin



Gelatin methacrylamide

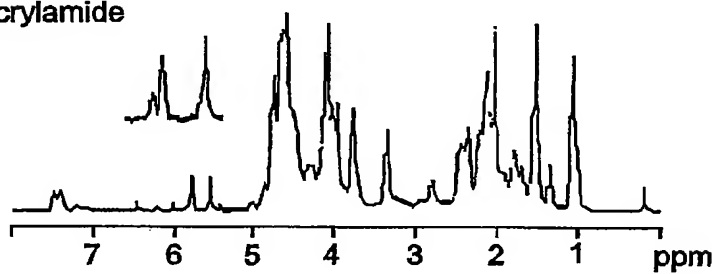


FIG. 24

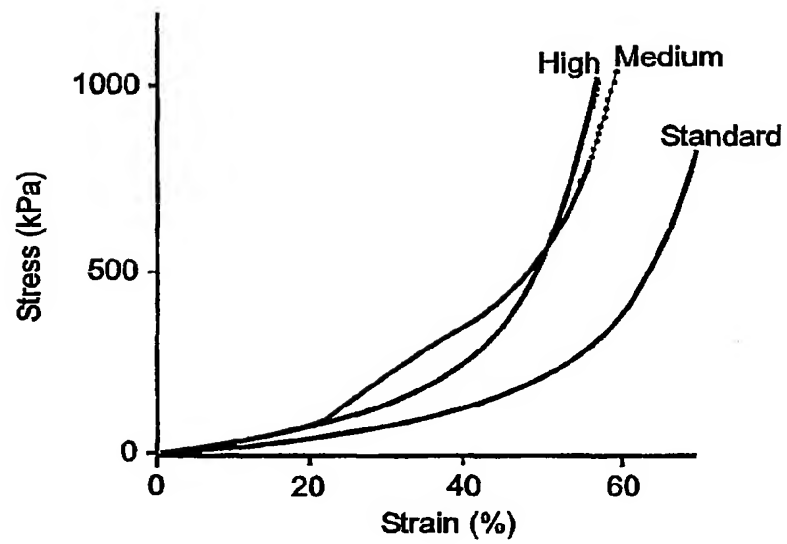


FIG. 25

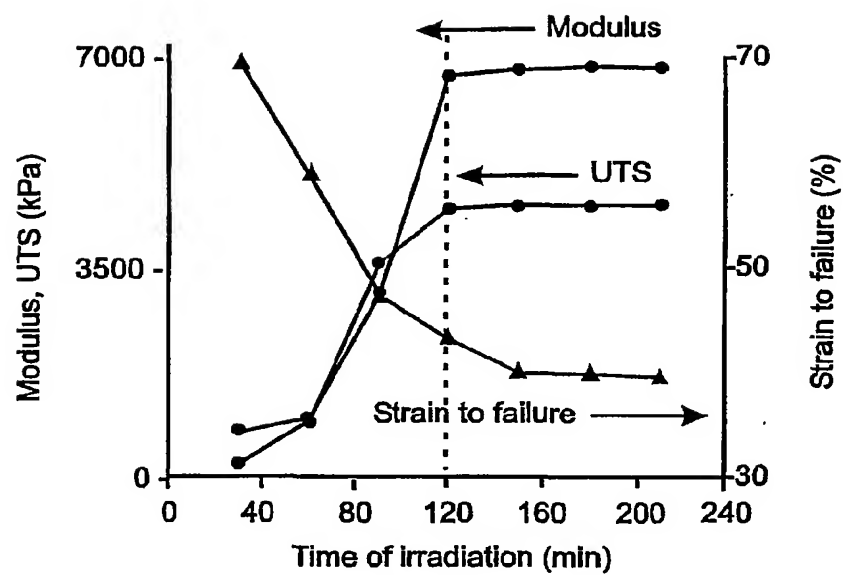


FIG. 26

26/29

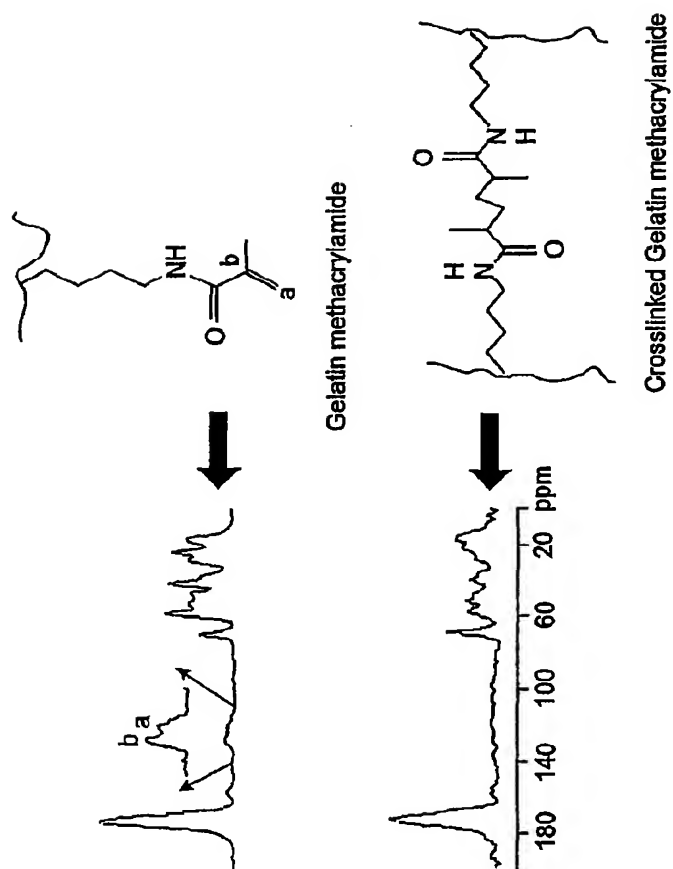


FIG. 27

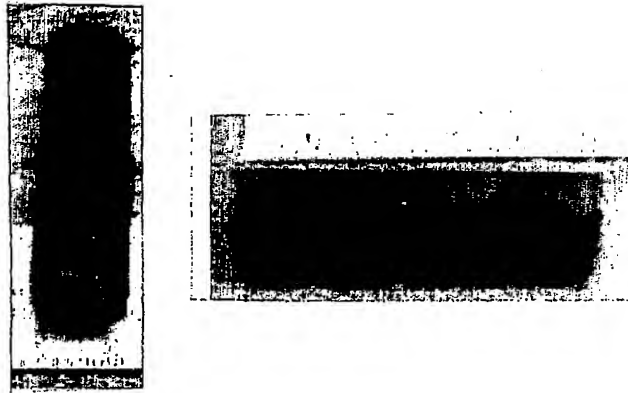


FIG. 28A



FIG. 28B

28/29

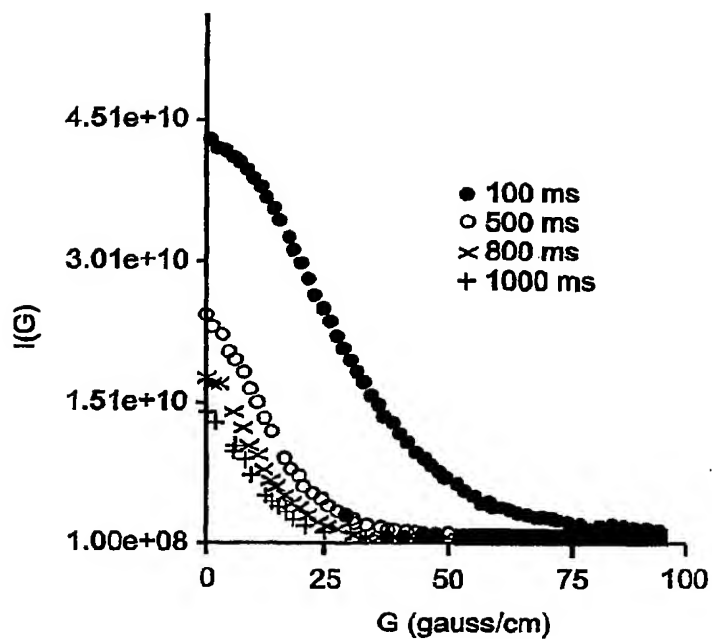


FIG. 29A

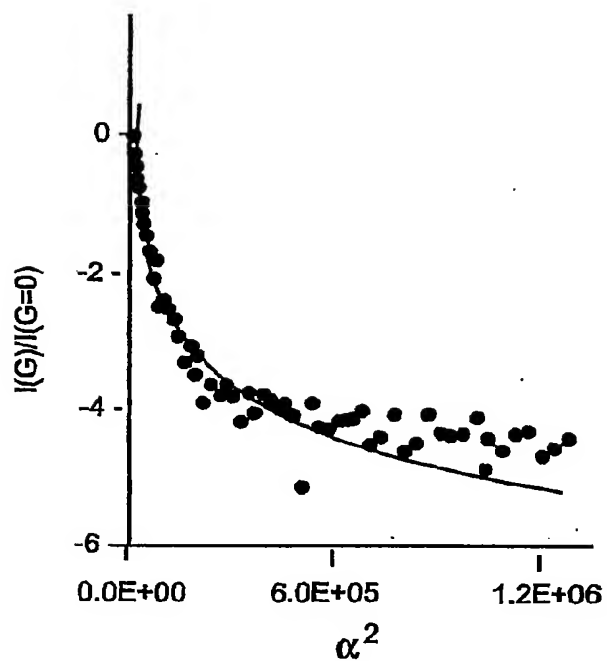


FIG. 29B

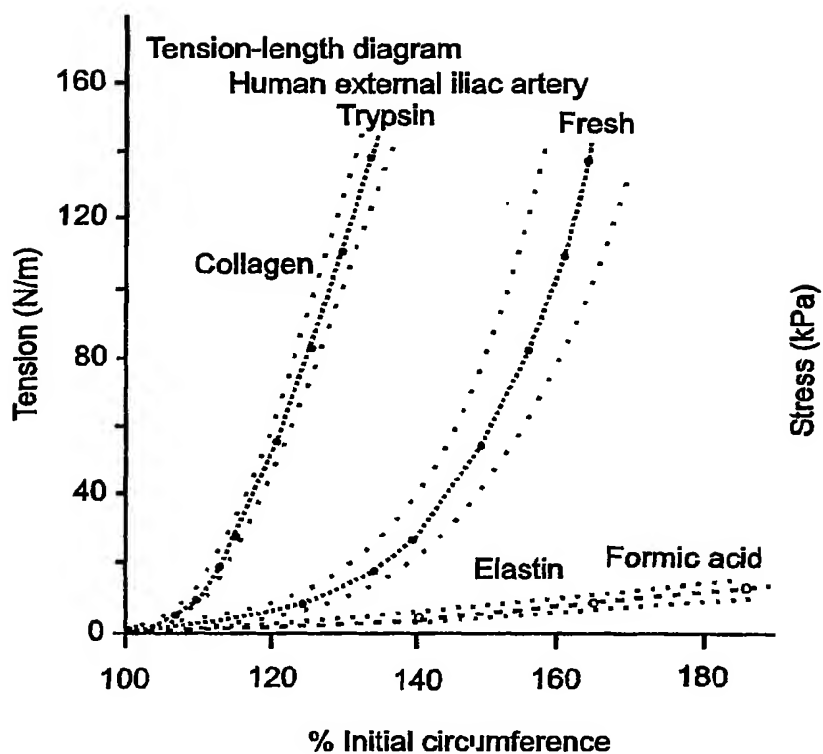


FIG. 30A

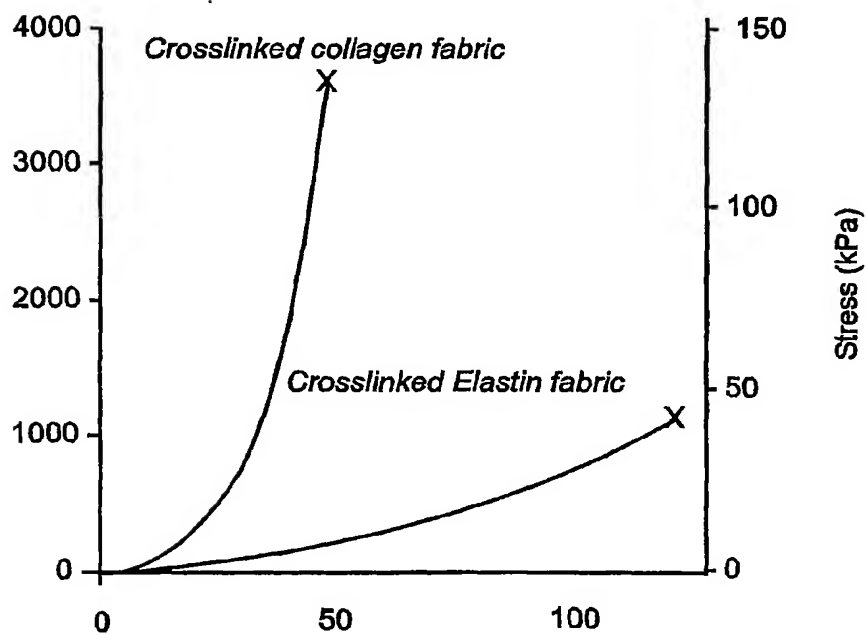


FIG. 30B

SEQUENCE LISTING

<110> Emory University

Chaikof, Elliot

Huang, Lei

Nagapudi, Karthik

Conticello, Vincent

<120> Native Protein Mimetic Fibers, Fiber Networks and Fabrics for Medical Use

<130> 29-01 WO

<140> unassigned

<141> 2001-04-20

<150> US 60/221,828

<151> 2000-07-28

<150> US 60/198,792

<151> 2000-04-20

<160> 4

<170> PatentIn version 3.0

<210> 1

<211> 4

<212> PRT

<213> artificial, sequence motif of elastin mimetic protein.

<400> 1

Val Pro Gly Gly
1

<210> 2

<211> 5

<212> PRT

<213> artificial, sequence motif in elastin mimetic protein

<400> 2

Val Pro Gly Val Gly
1 5

<210> 3

<211> 6

<212> PRT

<213> artificial, sequence motif in elastin mimetic protein

<400> 3

Ala Pro Gly Val Gly Val
1 5

<210> 4

<211> 25

<212> PRT

<213> artificial, sequence motifs in elastin mimetic protein

<400> 4

Val Pro Gly Val Gly Val Pro Gly Val Gly Val Pro Gly Val Gly Val
1 5 10 15

Pro Gly Val Gly Val Pro Gly Lys Gly
20 25